

JointAI: Joint Analysis and Imputation of Incomplete Data in R

Nicole S. Erler
Erasmus Medical Center

Dimitris Rizopoulos
Erasmus Medical Center

Emmanuel M.E.H. Lesaffre
KU Leuven

Abstract

Missing data occur in many types of studies and typically complicate the analysis. Multiple imputation, either using joint modelling or the more flexible fully conditional specification approach, are popular and work well in standard settings. In settings involving non-linear associations or interactions, however, incompatibility of the imputation model with the analysis model is an issue often resulting in bias. Similarly, complex outcomes such as longitudinal or survival outcomes cannot be adequately handled by standard implementations. In this paper, we introduce the R package **JointAI**, which utilizes the Bayesian framework to perform simultaneous analysis and imputation in regression models with incomplete covariates. Using a fully Bayesian joint modelling approach it overcomes the issue of uncongeniality while retaining the attractive flexibility of fully conditional specification multiple imputation by specifying the joint distribution of analysis and imputation models as a sequence of univariate models that can be adapted to the type of variable. **JointAI** provides functions for Bayesian inference with generalized linear and generalized linear mixed models as well as survival models, that take arguments analogous to their corresponding and well known complete data versions from base R and other packages. Usage and features of **JointAI** are described and illustrated using various examples and the theoretical background is outlined.

Keywords: imputation, Bayesian, missing covariate, non-linear, interaction, multi-level, survival, R, JAGS.

1. Introduction

Missing data are a challenge common to the analysis of data from virtually all kinds of studies. Especially when many variables are measured, as in big cohort studies, or when data are obtained retrospectively, e.g., from registries, proportions of missing values up to 50% in some variables are not uncommon.

Multiple imputation, which is often considered the gold standard to handle incomplete data, has its origin in the 1970s and was primarily developed for survey data (Rubin 1987, 2004). One of its first implementations in R (R Core Team 2019) is the package **norm** (Novo and Schafer 2013), which performs multiple imputation under the joint modelling framework using a multivariate normal distribution (Schafer 1997). Nowadays more frequently used is multiple imputation using a fully conditional specification (FCS), also called multiple imputation using chained equations (MICE) and its seminal implementation in the R package **mice** (Van Buuren and Groothuis-Oudshoorn 2011; Van Buuren 2012).

Since the introduction of multiple imputation datasets have gotten more complex. Therefore, more sophisticated methods that can adequately handle the features of modern data and comply with assumptions made in its analysis are required. Modern studies do not only record univariate outcomes, measured in a cross-sectional setting but outcomes that consist of two or more measurements, such as repeatedly measured or survival outcomes. Furthermore, non-linear effects, introduced by functions of covariates, such as transformations, polynomials or splines, or interactions between variables are considered in the analysis and, hence, need to be taken into account during imputation.

Standard multiple imputation, either using FCS or a joint modelling approach, e.g., under a multivariate normal distribution, assumes linear associations between all variables. Moreover, FCS requires the outcome to be explicitly specified in each of the linear predictors of the full conditional distributions. In settings where the outcome is more complex than just univariate, this is not straightforward and not generally possible without information loss, leading to misspecified imputation models.

Some extensions of standard multiple imputation have been developed and are implemented in R packages and other software, but the larger part of the software for imputation is restricted to standard settings such as cross-sectional survey data. R packages offering extensions frequently focus on particular settings and researchers need to be familiar with several different packages, which often require input and specifications in very different forms. Moreover, most R packages dealing with incomplete data implement multiple imputation, i.e., create multiple imputed datasets, which are then analyzed in a second step, followed by pooling of the results.

The R package **JointAI** (Erler 2019), which is presented in this paper, follows a different, fully Bayesian approach. It provides a unified framework for both simple and more complex models, using a consistent specification most users will be familiar with from commonly used (base) R functions. By modelling the analysis model of interest jointly with the incomplete covariates, analysis and imputation can be performed simultaneously while assuring compatibility between all sub-models (Erler, Rizopoulos, van Rosmalen, Jaddoe, Franco, and Lesaffre 2016; Erler, Rizopoulos, Jaddoe, Franco, and Lesaffre 2019). In this joint modelling approach, the added uncertainty due to the missing values is automatically taken into account in the posterior distribution of the parameters of interest, and no pooling of results from repeated analyses is necessary. The joint distribution is specified in a convenient way, using a sequence of conditional distributions that can be specified flexibly according to each type of variable. Since the analysis model of interest defines the first distribution in the sequence, the outcome is included in the joint distribution without the need for it to enter the linear predictor of any of the other models. Moreover, non-linear associations that are part of the analysis model are automatically taken into account for the imputation of missing values. This directly enables our approach to handle complicated models, with complex outcomes and flexible linear predictors.

In this paper, we introduce the R package **JointAI**, which performs joint analysis and imputation of regression models with incomplete covariates under the missing at random (MAR) assumption (Rubin 1976), and explain how data with incomplete covariate information can be analyzed and imputed with it. The package is available for download at the Comprehensive R Archive Network (CRAN) under <https://CRAN.R-project.org/package=JointAI>. Section 2 briefly describes the theoretical background. An outline of the general structure of **JointAI** is given in Section 3, followed by an introduction of the example datasets that are used throughout the paper in Section 4. Details about model specification, settings controlling the

Markov Chain Monte Carlo sampling, and summary, plotting and other functions that can be applied after fitting the model are given in Sections 5 through 7. We conclude the paper with an outlook of planned extensions and discuss the limitations that are introduced by the assumptions made in the fully Bayesian approach.

2. Theoretical background

Consider the general setting of a regression model where interest lies in a set of parameters $\boldsymbol{\theta}$ that describe the association between a univariate outcome \mathbf{y} and a set of covariates $\mathbf{X} = (\mathbf{x}_1, \dots, \mathbf{x}_p)$. In the Bayesian framework, inference over $\boldsymbol{\theta}$ is obtained by estimation of the posterior distribution of $\boldsymbol{\theta}$, which is proportional to the product of the likelihood of the data (\mathbf{y}, \mathbf{X}) and the prior distribution of $\boldsymbol{\theta}$,

$$p(\boldsymbol{\theta} \mid \mathbf{y}, \mathbf{X}) \propto p(\mathbf{y}, \mathbf{X} \mid \boldsymbol{\theta}) p(\boldsymbol{\theta}).$$

When some of the covariates are incomplete, \mathbf{X} consists of two parts, the completely observed variables \mathbf{X}_{obs} and those variables that are incomplete, \mathbf{X}_{mis} . If \mathbf{y} had missing values (and this missingness was ignorable), the only necessary change in the formulas below would be to replace \mathbf{y} by \mathbf{y}_{mis} . We will, therefore, consider \mathbf{y} to be completely observed. In the implementation in the R package **JointAI**, missing values in the outcome are allowed and are imputed automatically.

The likelihood of the complete data, i.e., observed and unobserved data, can be factorized in the following convenient way:

$$p(\mathbf{y}, \mathbf{X}_{obs}, \mathbf{X}_{mis} \mid \boldsymbol{\theta}) = p(\mathbf{y} \mid \mathbf{X}_{obs}, \mathbf{X}_{mis}, \boldsymbol{\theta}_{y|x}) p(\mathbf{X}_{mis} \mid \mathbf{X}_{obs}, \boldsymbol{\theta}_x),$$

where the first factor constitutes the analysis model of interest, described by a vector of parameters $\boldsymbol{\theta}_{y|x}$, and the second factor is the joint distribution of the incomplete variables, i.e., the imputation part of the model, described by parameters $\boldsymbol{\theta}_x$, and $\boldsymbol{\theta} = (\boldsymbol{\theta}_{y|x}^\top, \boldsymbol{\theta}_x^\top)^\top$.

Explicitly specifying the joint distribution of all data is one of the major advantages of the Bayesian approach, since this facilitates the use of all available information of the outcome in the imputation of the incomplete covariates (Erler *et al.* 2016), which becomes especially relevant for more complex outcomes like repeatedly measured variables (see Section 2.2.1).

In complex models the posterior distribution can usually not be derived analytically but Markov Chain Monte Carlo (MCMC) methods are used to obtain samples from the posterior distribution. The MCMC sampling in **JointAI** is done using Gibbs sampling, which iteratively samples from the full conditional distributions of the unknown parameters and missing values.

In the following sections we describe each of the three parts of the model, the analysis model, the imputation part and the prior distributions, in detail.

2.1. Analysis model

The analysis model of interest is described by the probability density function $p(\mathbf{y} \mid \mathbf{X}, \boldsymbol{\theta}_{y|x})$. The R package **JointAI** can currently handle analysis models that are either generalized linear regression models (GLM), generalized linear mixed models (GLMM), cumulative logit (mixed) models, parametric (Weibull) survival models or Cox proportional hazards models.

Generalized linear (mixed) models

For a GLM the probability density function is chosen from the exponential family and has the linear predictor

$$g\{E(y_i \mid \mathbf{X}, \boldsymbol{\theta}_{y|x})\} = \mathbf{x}_i^\top \boldsymbol{\beta},$$

where $g(\cdot)$ is a link function, y_i the value of the outcome variable for subject i , and \mathbf{x}_i is a column vector containing the row of \mathbf{X} that contains the covariate information for i .

For a GLMM the linear predictor is of the form

$$g\{E(y_{ij} \mid \mathbf{X}, \mathbf{b}_i, \boldsymbol{\theta}_{y|x})\} = \mathbf{x}_{ij}^\top \boldsymbol{\beta} + \mathbf{z}_{ij}^\top \mathbf{b}_i,$$

where y_{ij} is the j -th outcome of subject i , \mathbf{x}_{ij} is the corresponding vector of covariate values, \mathbf{b}_i a vector of random effects pertaining to subject i , and \mathbf{z}_{ij} a column vector containing the row of the design matrix of the random effects, \mathbf{Z} , that corresponds to the j -th measurement of subject i . \mathbf{Z} typically contains a subset of the variables in \mathbf{X} , and \mathbf{b}_i follows a normal distribution with mean zero and covariance matrix \mathbf{D} .

In both cases the parameter vector $\boldsymbol{\theta}_{y|x}$ contains the regression coefficients $\boldsymbol{\beta}$, and potentially additional variance parameters (e.g., for linear (mixed) models), for which prior distributions will be specified in Section 2.3.

Cumulative logit (mixed) models

Cumulative logit mixed models are of the form

$$\begin{aligned} y_{ij} &\sim \text{Mult}(\pi_{ij,1}, \dots, \pi_{ij,K}), \\ \pi_{ij,1} &= P(y_{ij} \leq 1), \\ \pi_{ij,k} &= P(y_{ij} \leq k) - P(y_{ij} \leq k-1), \quad k \in 2, \dots, K-1, \\ \pi_{ij,K} &= 1 - \sum_{k=1}^{K-1} \pi_{ij,k}, \\ \text{logit}(P(y_{ij} \leq k)) &= \gamma_k + \eta_{ij}, \quad k \in 1, \dots, K, \\ \eta_{ij} &= \mathbf{x}_{ij}^\top \boldsymbol{\beta} + \mathbf{z}_{ij}^\top \mathbf{b}_i, \\ \gamma_1, \delta_1, \dots, \delta_{K-1} &\stackrel{iid}{\sim} N(\mu_\gamma, \sigma_\gamma^2), \\ \gamma_k &\sim \gamma_{k-1} + \exp(\delta_{k-1}), \quad k = 2, \dots, K, \end{aligned}$$

where $\pi_{ij,k} = P(y_{ij} = k)$ and $\text{logit}(x) = \log\left(\frac{x}{1-x}\right)$. A cumulative logit regression model for a univariate outcome y_i can be obtained by dropping the index j and omitting $\mathbf{z}_{ij}^\top \mathbf{b}_i$. In

cumulative logit (mixed) models, the design matrix \mathbf{X} does not contain an intercept, since outcome category specific intercepts $\gamma_1, \dots, \gamma_K$ are specified. Here, the parameter vector $\boldsymbol{\theta}_{y|x}$ includes the regression coefficients $\boldsymbol{\beta}$, the first intercept γ_1 and increments $\delta_1, \dots, \delta_{K-1}$.

Survival models

Survival data are typically characterized by the observed event or censoring times, T_i , and the event indicator, D_i , which is one if the event was observed and zero otherwise. **JointAI** provides two types of models to analyse right censored survival data, a parametric model which assumes a Weibull distribution for the true (but partially unobserved) survival times T^* , and a semi-parametric Cox proportional hazards model.

The parametric survival model is implemented as

$$\begin{aligned} T_i^* &\sim \text{Weibull}(1, r_i, s), \\ D_i &\sim \mathbb{1}(T_i^* \geq C_i), \\ \log(r_j) &= -\mathbf{x}_j^\top \boldsymbol{\beta}, \\ s &\sim \text{Exp}(0.01), \end{aligned}$$

where $\mathbb{1}$ is the indicator function which is one if $T_i^* \geq C_i$, and zero otherwise.

For the Cox proportional hazards model, following [Lunn, Jackson, Best, Spiegelhalter, and Thomas \(2012\)](#), a counting process representation is implemented, where the baseline hazard is assumed to be piecewise constant and changes only at observed event times. Let $\{N_i(t), t \geq 0\}$ be an event counting process for individual i , where $N_i(t) = 0$ until the individual experiences an event, and increases by one at the time of the event. $dN_i(t)$ then denotes the change in $N_i(t)$ in the interval $[t, t + dt)$, where dt is the length of the interval, which can be modeled as a Poisson random variable with time-varying intensity $\lambda_i(t)$. This intensity depends on covariates \mathbf{x} , the baseline hazard $\lambda_0(t)$, and the risk set indicator $R_i(t)$, which is equal to one if subject i is at risk for an event at time t , and zero otherwise:

$$\begin{aligned} dN(t)_i &\sim \text{Poisson}(\lambda_i(t)), \quad t \in 0, \dots, T \\ \lambda_i(t) &= \exp(\mathbf{x}_i^\top \boldsymbol{\beta}) \lambda_0(t) R_i(t), \\ \lambda_0(t) &\sim \text{Gamma}(c\lambda_0(t)^*, c), \end{aligned}$$

where λ_{0t}^* is a prior guess at the failure rate at t , and c is the confidence about that guess.

2.2. Imputation part

A convenient way to specify the joint distribution of the incomplete covariates $\mathbf{X}_{mis} = (\mathbf{x}_{mis_1}, \dots, \mathbf{x}_{mis_q})$ is to use a sequence of conditional univariate distributions ([Erler et al. 2016](#); [Ibrahim, Chen, and Lipsitz 2002](#))

$$\begin{aligned} p(\mathbf{x}_{mis_1}, \dots, \mathbf{x}_{mis_q} \mid \mathbf{X}_{obs}, \boldsymbol{\theta}_x) &= p(\mathbf{x}_{mis_1} \mid \mathbf{X}_{obs}, \boldsymbol{\theta}_{x_1}) \\ &\quad \prod_{\ell=2}^q p(\mathbf{x}_{mis_\ell} \mid \mathbf{X}_{obs}, \mathbf{x}_{mis_1}, \dots, \mathbf{x}_{mis_{\ell-1}}, \boldsymbol{\theta}_{x_\ell}), \end{aligned} \quad (1)$$

with $\boldsymbol{\theta}_x = (\boldsymbol{\theta}_{x_1}^\top, \dots, \boldsymbol{\theta}_{x_q}^\top)^\top$.

Each of the conditional distributions is a member of the exponential family, extended with distributions for ordinal categorical variables, and chosen according to the type of the respective variable. Its linear predictor is

$$g_\ell \{E(x_{i,mis_\ell} \mid \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis_{<\ell}}, \boldsymbol{\theta}_{x_\ell})\} = (\mathbf{x}_{i,obs}^\top, x_{i,mis_1}, \dots, x_{i,mis_{\ell-1}}) \boldsymbol{\alpha}_\ell, \quad \ell = 1, \dots, q,$$

where $\mathbf{x}_{i,mis_{<\ell}} = (x_{i,mis_1}, \dots, x_{i,mis_{\ell-1}})^\top$ and $\mathbf{x}_{i,obs}$ is the vector of values for subject i of those covariates that are observed for all subjects.

Factorization of the joint distribution of the covariates in such a sequence yields a straightforward specification of the joint distribution, even when the covariates are of mixed type.

Missing values in the covariates are sampled from their full-conditional distribution that can be derived from the full joint distribution of outcome and covariates.

When, for instance, the analysis model is a GLM, the full conditional distribution of an incomplete covariate x_{i,mis_ℓ} can be written as

$$\begin{aligned} p(x_{i,mis_\ell} \mid \mathbf{y}_i, \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis_{-\ell}}, \boldsymbol{\theta}) &\propto p(y_i \mid \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis}, \boldsymbol{\theta}_{y|x}) p(\mathbf{x}_{i,mis} \mid \mathbf{x}_{i,obs}, \boldsymbol{\theta}_x) p(\boldsymbol{\theta}_{y|x}) p(\boldsymbol{\theta}_x) \\ &\propto p(y_i \mid \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis}, \boldsymbol{\theta}_{y|x}) \\ &\quad p(x_{i,mis_\ell} \mid \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis_{<\ell}}, \boldsymbol{\theta}_{x_\ell}) \\ &\quad \left\{ \prod_{k=\ell+1}^q p(x_{i,mis_k} \mid \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis_{<k}}, \boldsymbol{\theta}_{x_k}) \right\} \\ &\quad p(\boldsymbol{\theta}_{y|x}) p(\boldsymbol{\theta}_{x_\ell}) \prod_{k=\ell+1}^p p(\boldsymbol{\theta}_{x_k}), \end{aligned} \quad (2)$$

where $\boldsymbol{\theta}_{x_\ell}$ is the vector of parameters describing the model for the ℓ -th covariate, and contains the vector of regression coefficients $\boldsymbol{\alpha}_\ell$ and potentially additional (variance) parameters. The product of distributions enclosed by curly brackets represents the distributions of those covariates that have x_{mis_ℓ} as a predictive variable in the specification of the sequence in (1).

Even though (2) describes the actual imputation model, i.e., the distribution the imputed values for x_{i,mis_ℓ} are sampled from, we will use the term “imputation model” for the conditional distribution of x_{i,mis_ℓ} from (1), since the latter is the distribution that is explicitly specified by the user and, hence, of more relevance when using **JointAI**.

Imputation with longitudinal outcomes

Factorizing the joint distribution into analysis model and imputation part also facilitates extensions to settings with more complex outcomes, such as repeatedly measured outcomes. In the case where the analysis model is a GLMM or ordinal mixed model, the conditional distribution of the outcome in (2), $p(y_i \mid \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis}, \boldsymbol{\theta}_{y|x})$, has to be replaced by

$$\left\{ \prod_{j=1}^{n_i} p(y_{ij} \mid \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis}, \mathbf{b}_i, \boldsymbol{\theta}_{y|x}) \right\}. \quad (3)$$

Since \mathbf{y} does not appear in any of the other terms in (2), and (3) can be chosen to be a model that is appropriate for the outcome at hand, the thereby specified full conditional

distribution of x_{i,mis_ℓ} allows us to draw valid imputations that use all available information on the outcome.

This is an important difference to standard FCS, where the full conditional distributions used to impute missing values are specified directly, usually as regression models, and require the outcome to be explicitly included into the linear predictor of the imputation model. In settings with complex outcomes it is not clear how this should be done and simplifications may lead to biased results (Erler *et al.* 2016). The joint model specification utilized in **JointAI** overcomes this difficulty.

When some of the covariates are time-varying, it is convenient to specify models for these variables in the begining of the sequence of covariate models, so that models for longitudinal variables have other longitudinal and baseline covariates in their linear predictor, but longitudinal covariates do not enter the predictors of baseline covariates.

Note that, whenever there are incomplete baseline covariates it is necessary to specify models for all longitudinal variables, even completely observed ones, while models for completely observed baseline covariates can be omitted. This becomes clear when we extend the factorized joint distribution from above with completely and incompletely observed longitudinal (level-1) covariates \mathbf{s}_{obs} and \mathbf{s}_{mis} :

$$\begin{aligned} p(y_{ij} \mid \mathbf{s}_{ij,obs}, \mathbf{s}_{ij,mis}, \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis}, \boldsymbol{\theta}_y | x) \\ p(\mathbf{s}_{ij,mis} \mid \mathbf{s}_{ij,obs}, \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis}, \boldsymbol{\theta}_{s_{mis}}) p(\mathbf{s}_{ij,obs} \mid \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis}, \boldsymbol{\theta}_{s_{obs}}) \\ p(\mathbf{x}_{i,mis} \mid \mathbf{x}_{i,obs}, \boldsymbol{\theta}_{x_{mis}}) p(\mathbf{x}_{i,obs} \mid \boldsymbol{\theta}_{x_{obs}}) p(\boldsymbol{\theta}_y | x) p(\boldsymbol{\theta}_{s_{mis}}) p(\boldsymbol{\theta}_{s_{obs}}) p(\boldsymbol{\theta}_{x_{mis}}) p(\boldsymbol{\theta}_{x_{obs}}) \end{aligned}$$

Given that the parameter vectors $\boldsymbol{\theta}_{x_{obs}}$, $\boldsymbol{\theta}_{x_{mis}}$, $\boldsymbol{\theta}_{s_{obs}}$ and $\boldsymbol{\theta}_{s_{mis}}$ are a priori independent, and $p(\mathbf{x}_{i,obs} \mid \boldsymbol{\theta}_{x_{obs}})$ is independent of both x_{mis} and s_{mis} , it can be omitted.

Since $p(\mathbf{s}_{ij,obs} \mid \mathbf{x}_{i,obs}, \mathbf{x}_{i,mis}, \boldsymbol{\theta}_{s_{obs}})$, however, has $\mathbf{x}_{i,mis}$ in its linear predictor and will, hence, be part of the full conditional distribution of $\mathbf{x}_{i,mis}$, it cannot be ommitted from the model specification.

Non-linear associations and interactions

Other settings in which the fully Bayesian approach employed in **JointAI** has an advantage over standard FCS are settings with interaction terms that involve incomplete covariates or when the association of the outcome with an incomplete covariate is non-linear. In standard FCS such settings lead to incompatible imputation models (White, Royston, and Wood 2011; Bartlett, Seaman, White, and Carpenter 2015). This becomes clear when considering the following simple example where the analysis model of interest is the linear regression $y_i = \beta_0 + \beta_1 x_i + \beta_2 x_i^2 + \varepsilon_i$ and x_i is imputed using $x_i = \alpha_0 + \alpha_1 y_i + \tilde{\varepsilon}_i$. While the analysis model assumes a quadratic relationship, the imputation model assumes a linear association between \mathbf{x} and \mathbf{y} and there cannot be a joint distribution that has the imputation and analysis model as its full conditional distributions.

Because, in **JointAI**, the analysis model is a factor in the full conditional distribution that is used to impute x_i , the non-linear association is taken into account. Furthermore, since it is the joint distribution that is specified, and the full conditional then derived from it, the joint distribution is ensured to exist.

2.3. Prior distributions

Prior distributions have to be specified for all (hyper)parameters. A common prior choice for the regression coefficients is the normal distribution with mean zero and large variance. In **JointAI** variance parameters in models for normally distributed variables are specified as, by default vague, inverse-gamma distributions.

The covariance matrix of the random effects in a mixed model, \mathbf{D} , is assumed to follow an inverse Wishart distribution where the degrees of freedom are usually chosen to be equal to the dimension of the random effects, and the scale matrix is diagonal. Since the magnitude of the diagonal elements relates to the variance of the random effects, the choice of suitable values depends on the scale of the variable the random effect is associated with. Therefore, **JointAI** uses independent gamma hyperpriors for each of the diagonal elements. More details about the default hyperparameters and how to change them are given in Section 5.7 and Appendix A.

3. Package structure

The package **JointAI** has seven main functions, `lm_imp()`, `glm_imp()`, `clm_imp()`, `lme_imp()`, `glme_imp()`, `clmm_imp`, `survreg_imp()` and `coxph_imp()`, that perform regression of continuous and categorical, univariate or multi-level data as well as right-censored survival data. Model specification is similar to the specification of standard regression models in R and described in detail in Section 5.

Based on the specified model formula and other function arguments, **JointAI** does some pre-processing of the data. It checks which variables are incomplete and/or time-varying, and identifies their measurement level in order to specify appropriate (imputation) models. Interactions and functional forms of variables are detected in the model formula, and corresponding design matrices for the various parts of the model are created.

MCMC sampling is performed by the program JAGS (Plummer 2003). The JAGS model, data list, containing all necessary parts of the data, and user-specified settings for the MCMC sampling (described in Section 6) are passed to JAGS via the R package **rjags** (Plummer 2018).

The above named main functions `*_imp()`, all return an object of class **JointAI**. Summary and plotting methods for **JointAI** objects, as well as functions to evaluate convergence and precision of the MCMC samples, to predict from **JointAI** objects and to export imputed values are discussed in Section 7.

Currently, the package works under the assumption of a missing at random (MAR) missingness process (Rubin 1976, 1987). When this assumption holds, observations with missing outcome may be excluded from the analysis in the Bayesian framework. Hence, missing values in the outcome do not require special treatment in this setting, and, therefore, our focus here is on missing values in covariates. Nevertheless, **JointAI** can handle missing values in the outcome; they are automatically imputed using the specified analysis model.

4. Example data

To illustrate the functionality of **JointAI**, we use three datasets that are part of this package or the package **survival** (Therneau 2015; Terry M. Therneau and Patricia M. Grambsch 2000).

The NHANES data contain measurements from a cross-sectional cohort study, whereas the `simLong` data is a simulated dataset based on a longitudinal cohort study in toddlers. The third dataset (`lung`) contains data on survival of patients with advanced lung cancer.

4.1. The NHANES data

The NHANES data is a subset of observations from the 2011 – 2012 wave of the National Health and Nutrition Examination Survey ([National Center for Health Statistics \(NCHS\) 2011 – 2012](#)) and contains information on 186 men and women between 20 and 80 years of age. The variables contained in this dataset are

- `SBP`: systolic blood pressure in mmHg; complete
- `gender`: male vs. female; complete
- `age`: in years; complete
- `race`: 5 unordered categories; complete
- `WC`: waist circumference in cm; 1.1% missing
- `alc`: weekly alcohol consumption; binary; 18.3% missing
- `educ`: educational level; binary; complete
- `creat`: creatinine concentration in mg/dL; 4.5% missing
- `albu`: albumin concentration in g/dL; 4.3% missing
- `uricacid`: uric acid concentration in mg/dL; 4.3% missing
- `bili`: bilirubin concentration in mg/dL; 4.3% missing
- `occup`: occupational status; 3 unordered categories; 15.1% missing
- `smoke`: smoking status; 3 ordered categories; 3.8% missing

Figure 1 shows histograms and barplots of all continuous and categorical variables, respectively, together with the proportion of missing values for incomplete variables. Such a plot can be obtained with the function `plot_all()`. Arguments `fill` and `border` allow the user to change colors, the number of rows and columns can be adapted using `nrow` and/or `ncol`, and additional arguments can be passed to `hist()` and `barplot()` via "...".

The pattern of missing values in the NHANES data is shown in Figure 2. This plot can be obtained using the function `md_pattern()`. Again, arguments `color` and `border` allow to change colors and arguments such as `legend.position`, `print_xaxis` and `print_yaxis` permit further customization.

Each row represents a pattern of missing values, where observed (missing) values are depicted with dark (light) color. The frequency with which each of the patterns is observed is given on the right margin, the number of missing values in each variable is given underneath the plot. Rows and columns are ordered by number of cases per pattern (decreasing) and number of missing values (increasing). The first row, for instance, shows that there are 116 complete cases, the second row that there are 29 cases for which only `alc` is missing. Furthermore, it is apparent that `creat`, `albu`, `uricacid` and `bili` are always missing together. Since these variables are all measured in serum, this is not surprising.

The function `md_pattern()` also returns the missing data pattern in matrix representation when `pattern = TRUE`. There, missing and observed values are represented with a 0 and 1, respectively.

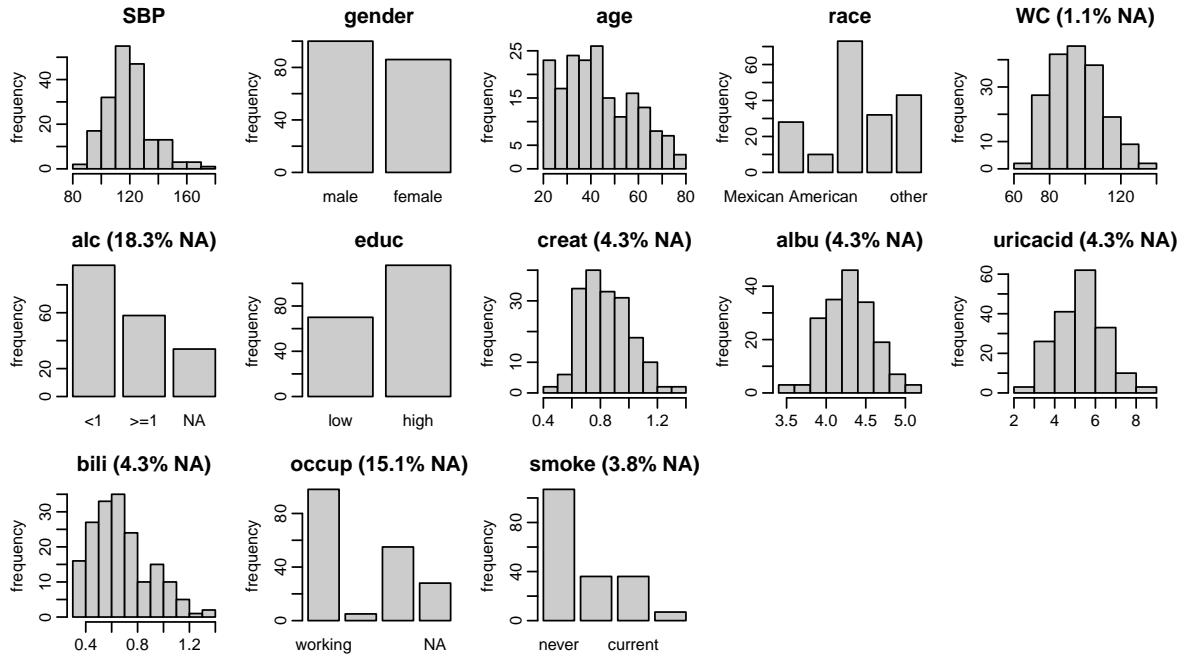


Figure 1: Distribution of the variables in the NHANES data (with percentage of missing values given for incomplete variables).

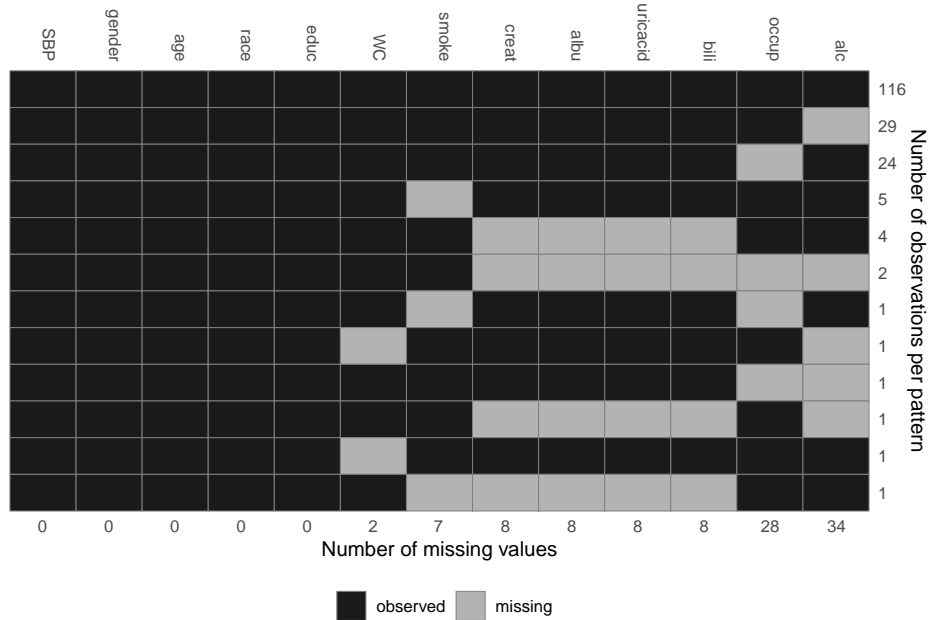


Figure 2: Missing data pattern of the NHANES data.

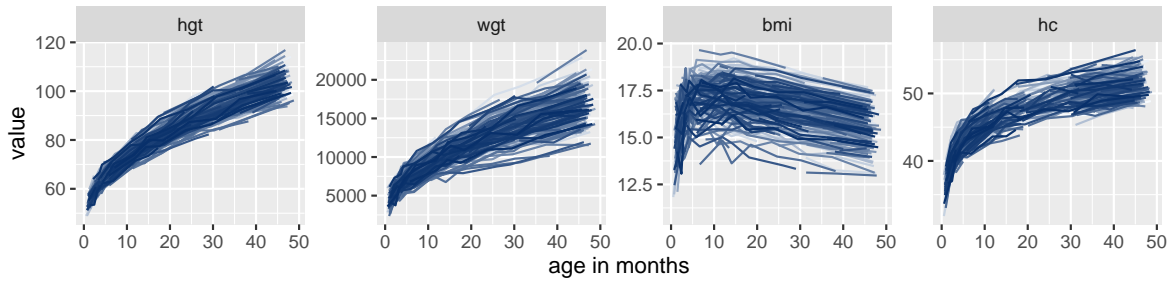


Figure 3: Trajectories of the continuous time-varying variables in the `simLong` data.

4.2. The `simLong` data

The `simLong` data is a simulated dataset mimicking a longitudinal cohort study of 200 mother-child pairs. It contains the following baseline (i.e., not time-varying) covariates

- `GESTBIR`: gestational age at birth in weeks; complete
- `ETHN`: ethnicity; binary; 2.8% missing
- `AGE_M`: age of the mother at intake; complete
- `HEIGHT_M`: height of the mother in cm; 2.0% missing
- `PARITY`: number of times the mother has given birth; binary; 2.4% missing
- `SMOKE`: smoking status of the mother during pregnancy; 3 ordered categories; 12.2% missing
- `EDUC`: educational level of the mother; 3 ordered categories; 7.8% missing
- `MARITAL`: marital status; 3 unordered categories; 7.0% missing
- `ID`: subject identifier



and seven longitudinal variables:


- `time`: measurement occasion/visit (by design, children should have been measured at/around 1, 2, 3, 4, 7, 11, 15, 20, 26, 32, 40 and 50 months of age)
- `age`: child's age at measurement time in months
- `hgt`: child's height in cm; 20% missing
- `wgt`: child's weight in gram; 8.8% missing
- `bmi`: child's BMI (body mass index) in kg/m^2 ; 21.6% missing
- `hc`: child's head circumference in cm; 23.6% missing
- `sleep`: child's sleeping behaviour; 3 ordered categories; 24.7% missing

Figure 3 shows the longitudinal profiles of `hgt`, `wgt`, `bmi` and `hc` over age. All four variables clearly have a non-linear pattern over time.

Histograms and barplots of all variables in the `simLong` data are displayed in Figure 4. Here, the arguments `use_level` and `idvar` of the function `plot_all()` are used to display baseline (level-2) covariates on the subject level instead of the observation level:

```
R> par(mar = c(2, 3, 2.5, 1), mgp = c(2, 0.6, 0))
R> plot_all(simLong, use_level = TRUE, idvar = "ID", ncol = 5)
```

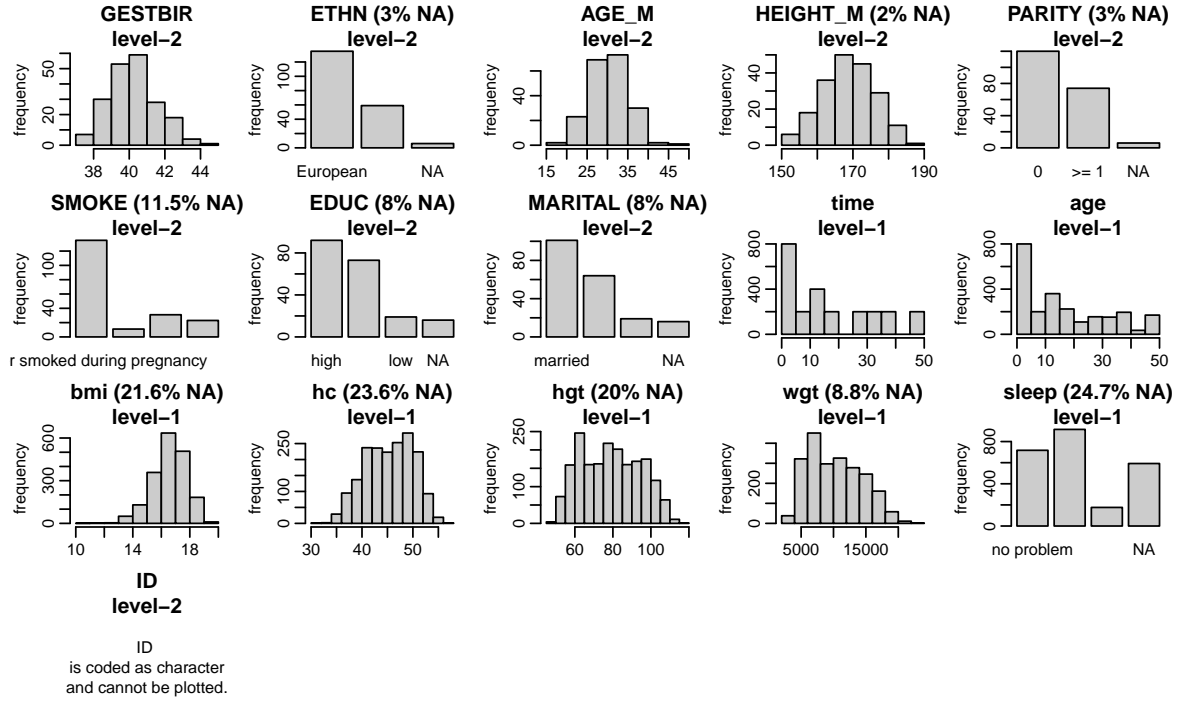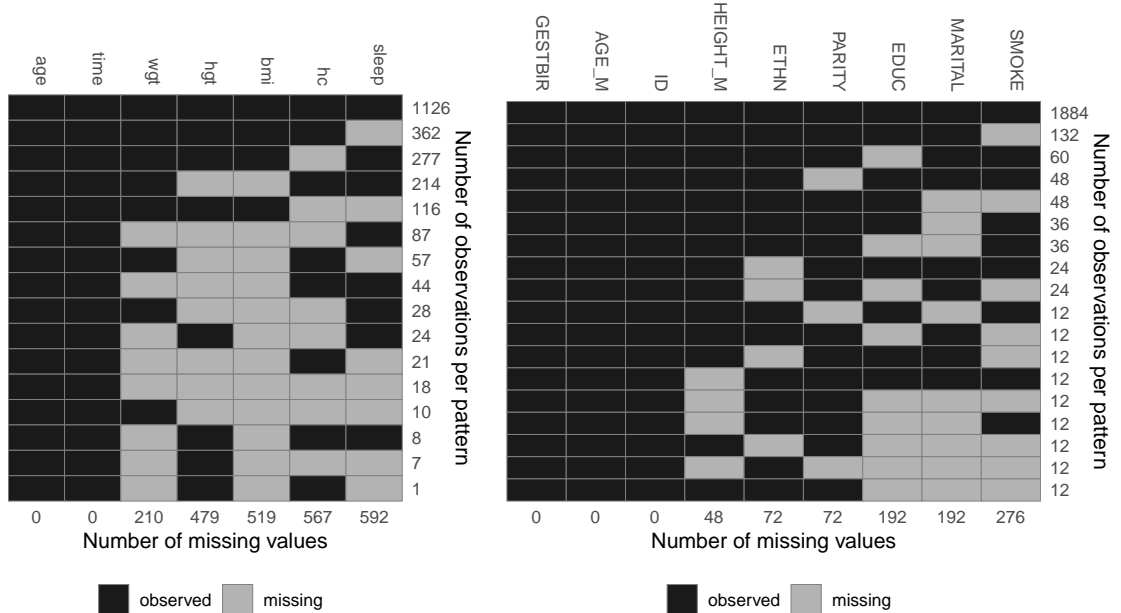Figure 4: Distribution of the variables in the `simLong` data.Figure 5: Missing data pattern of the `simLong` data (left: level-1 variables, right: level-2 variables).

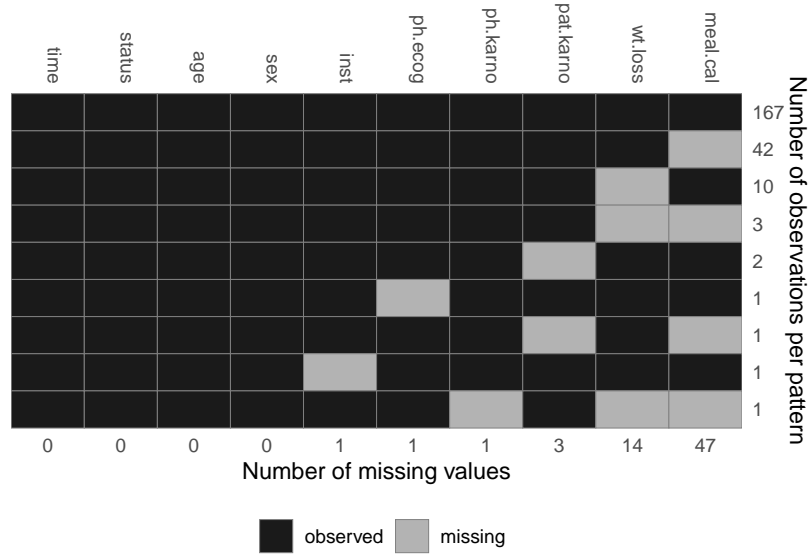Figure 6: Missing data pattern of the `lung` data.

The missing data pattern of the `simLong` data, shown in Figure 5. For readability the pattern is given separately for the level-1 (left) and level-2 (right) variables. is clearly non-monotone, but does not have any distinctive features.

4.3. The lung data

For demonstration of the use of **JointAI** for the analysis of survival data we use the dataset `lung` that is included in the R package **survival**. It contains data of 228 patients with advanced lung cancer and includes the following variables:

- `inst`: institution code; complete
- `time`: survival time in days; complete
- `status`: event indicator (1: censored, 2: dead); complete
- `age`: patient's age in years; complete
- `sex`: male (1) vs female (2); complete
- `ph.ecog`: ECOG performance score (describes how the disease impacts the patient's daily life); scale from 0 (no impact) to 5 (dead); 0.4% missing
- `ph.karno`: Karnofsky performance score as rated by physician (describes the degree of a patient's impairment by the disease); scale from 0 (dead) to 100 (no impairment); 0.4% missing
- `pat.karno`: Karnofsky performance score as rated by patient; 1.3% missing
- `meal.cal`: kilocalories consumed at meals; 20.6% missing
- `wt.loss`: weight loss over the last six months in kg; 6.1% missing

The missing data pattern and distribution of the observed values of the `lung` data is shown in Figures 6 and 7.

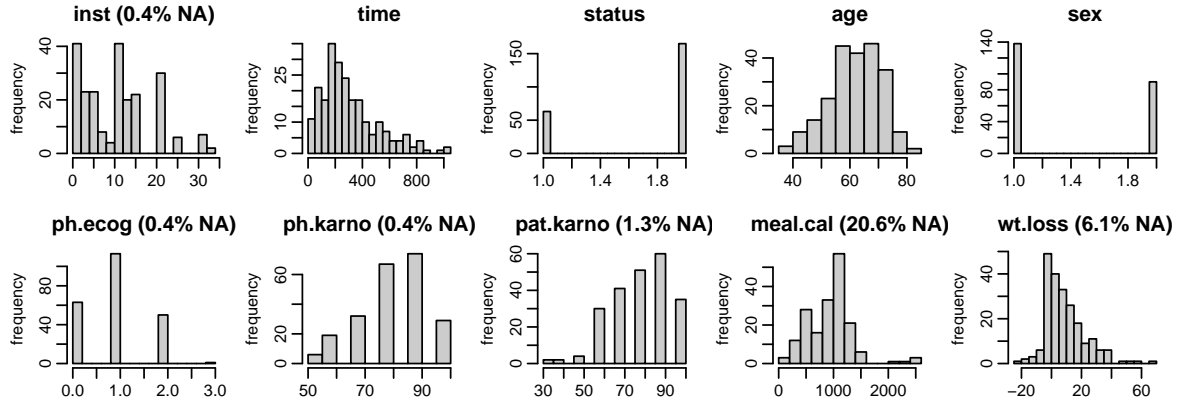


Figure 7: Distribution of the variables in the lung data (with percentage of missing values given for incomplete variables).

5. Model specification

The main arguments of the functions

```
R> lm_imp(formula, data,
R>         n.chains = 3, n.adapt = 100, n.iter = 0, thin = 1, ...)
R>
R> glm_imp(formula, family, data,
R>         n.chains = 3, n.adapt = 100, n.iter = 0, thin = 1, ...)
R>
R> clm_imp(formula, data,
R>         n.chains = 3, n.adapt = 100, n.iter = 0, thin = 1, ...)
R>
R> lme_imp(fixed, data, random,
R>         n.chains = 3, n.adapt = 100, n.iter = 0, thin = 1, ...)
R>
R> glme_imp(fixed, data, random, family,
R>         n.chains = 3, n.adapt = 100, n.iter = 0, thin = 1, ...)
R>
R> clmm_imp(fixed, data, random,
R>         n.chains = 3, n.adapt = 100, n.iter = 0, thin = 1, ...)
R>
R> survreg_imp(formula, data,
R>             n.chains = 3, n.adapt = 100, n.iter = 0, thin = 1, ...)
R>
R> coxph_imp(formula, data,
R>           n.chains = 3, n.adapt = 100, n.iter = 0, thin = 1, ...)
```

i.e., `formula`, `data`, `family`, `fixed`, and `random`, are used analogously to the specification in the standard complete data functions `lm()` and `glm()` from package **stats**, `lme()`, from package **nlme** (Pinheiro, Bates, DebRoy, Sarkar, and R Core Team 2019) and `survreg()` and

`coxph()` from package **survival**.

For the description of the remaining arguments see below and Section 6.

The arguments `formula` (in `lm_imp()`, `glm_imp()` and `clm_imp()`) and `fixed` (in `lme_imp()`, `glme_imp()` and `clmm_imp()`) take a standard two-sided `formula` object, where an intercept is added automatically. For the use of the argument `random` see Section 5.2.

Survival models expect the left hand side of `formula` to be a survival object (created with the function `Surv()` from package **survival**; see Section 5.3).

The argument `family` enables the choice of a distribution and link function from a range of options when using `glm_imp()` or `glme_imp()`. The implemented options are given in Table 1.

distribution	link
gaussian	identity, log, inverse
binomial	logit, probit, log, cloglog
Gamma	inverse, identity, log
poisson	log, identity

Table 1: Possible choices for the model `family` and `link` functions in `glm_imp()`.

5.1. Specification of the model formula

Interactions

In **JointAI**, interactions between any type of variables (observed, incomplete, time-varying) can be handled. When an incomplete variable is involved, the interaction term is re-calculated within each iteration of the MCMC sampling, using the imputed values from the current iteration. Interaction terms involving incomplete variables should hence not be pre-calculated as an additional variable since this would lead to inconsistent imputed values of main effect and interaction term.

Interactions between multiple variables can be specified using parentheses; for higher lever interactions the `^` operator can be used:

```
R> mod1a <- glm_imp(educ ~ gender * (age + smoke + creat),
R>                  data = NHANES, family = binomial())
R>
R> mod1b <- glm_imp(educ ~ gender + (age + smoke + creat)^3,
R>                  data = NHANES, family = binomial())
```

Non-linear functional forms

In practice, associations between outcome and covariates do not always meet the standard assumption of linearity. Often, assuming a logarithmic, quadratic or other non-linear effect is more appropriate.

For completely observed covariates, **JointAI** can handle any common type of function implemented in R, including splines, e.g., using `ns()` or `bs()` from the package **splines**. Since

functions involving variables that have missing values need to be re-calculated in each iteration of the MCMC sampling, currently, only functions that are available in JAGS can be used for incomplete variables. Those functions include:

- `log()`, `exp()`
- `sqrt()`, polynomials (using `I()`)
- `abs()`
- `sin()`, `cos()`
- algebraic operations involving one or multiple (in)complete variables, as long as the formula can be interpreted by JAGS.

The list of functions implemented in JAGS can be found in the JAGS user manual (Plummer 2017) available at <https://sourceforge.net/projects/mcmc-jags/files/Manuals/>.

Some examples (that do not necessarily have a meaningful interpretation or good model fit) are:

```
R> mod2a <- lm_imp(SBP ~ age + gender + abs(bili - creat), data = NHANES)

R> library("splines")
R> mod2b <- lm_imp(SBP ~ ns(age, df = 2) + gender + I(bili^2) + I(bili^3),
R+               data = NHANES)

R> mod2c <- lm_imp(SBP ~ age + gender + I(creat/albu^2), data = NHANES,
R>               trunc = list(albu = c(1e-5, 1e5)))

R> mod2d <- lm_imp(SBP ~ bili + sin(creat) + cos(albu), data = NHANES)
```

It is also possible to nest a function in another function.

```
R> mod2e <- lm_imp(SBP ~ age + gender + sqrt(exp(creat)/2), data = NHANES)
```

Functions with restricted support

When a function of an incomplete variable has restricted support, e.g., $\log(x)$ is only defined for $x > 0$, or, in `mod2c` from above `I(creat/albu^2)` can not be calculated for `albu = 0`, the model specified for that incomplete variable needs to comply with these restrictions. This can either be achieved by truncating the distribution, using the argument `trunc`, or by selecting a distribution that meets the restrictions.

Example: When using a log transformation for the covariate `bili`, we can use the default imputation method `"norm"` (a normal distribution) and truncate it by specifying `trunc = list(bili = c(lower, upper))`, where `lower` and `upper` are the smallest and largest values allowed:

```
R> mod3a <- lm_imp(SBP ~ age + gender + log(bili) + exp(creat),
R>                  trunc = list(bili = c(1e-5, 1e10)), data = NHANES)
```

Truncation always requires to specify both limits. Since `-Inf` and `Inf` are not accepted, a value far enough outside the range of the variable (here: `1e10`) can be selected for the second boundary of the truncation interval.

Alternatively, we may choose a model for the incomplete variable (using the argument `models`; for more details see Section 5.4) that only imputes positive values such as a log-normal distribution (`"lognorm"`) or a gamma distribution (`"gamma"`):

```
R> mod3b <- lm_imp(SBP ~ age + gender + log(bili) + exp(creat),
R>                  models = c(bili = 'lognorm'), data = NHANES)
R>
R> mod3c <- lm_imp(SBP ~ age + gender + log(bili) + exp(creat),
R>                  models = c(bili = 'gamma'), data = NHANES)
```

Functions that are not available in R

It is possible to use functions that have different names in R and JAGS, or that do exist in JAGS, but not in R, by defining a new function in R that has the name of the function in JAGS.

Example: In JAGS the inverse logit transformation is defined in the function `ilogit`. In base R, there is no function `ilogit`, but the inverse logit is available as the distribution function of the logistic distribution `plogis()`. Thus, we can define the function `ilogit()` as

```
R> ilogit <- plogis
```

and use it in the model formula

```
R> mod4a <- lm_imp(SBP ~ age + gender + ilogit(creat), data = NHANES)
```

A note on what happens inside JointAI

When a function of a complete or incomplete variable is used in the model formula, the main effect of that variable is automatically added as auxiliary variable (more on auxiliary variables in Section 5.5), and only the main effects are used as predictors in the imputation models.

In `mod2b`, for example, the spline of `age` is used as predictor for `SBP`, but in the imputation model for `bili`, `age` enters with a linear effect. This can be checked using the function `list_models()`, which prints a list of the covariate models used in an **JointAI** model. Here,

we are only interested in the predictor variables, and, hence, suppress printing of information on prior distributions, regression coefficients and other parameters by setting `priors`, `regcoef` and `otherpars` to `FALSE`:

```
R> list_models(mod2b, priors = FALSE, regcoef = FALSE, otherpars = FALSE)
```

Normal imputation model for 'bili'

* Predictor variables:

(Intercept), genderfemale, age

When a function of a variable is specified as auxiliary variable, this function is used in the imputation models. For example, in `mod4b`, waist circumference (`WC`) is not part of the model for `SBP`, and the quadratic term $I(WC^2)$ is used in the linear predictor of the imputation model for `bili`:

```
R> mod4b <- lm_imp(SBP ~ age + gender + bili, auxvars = "I(WC^2)",
```

```
R+      data = NHANES)
```

```
R>
```

```
R> list_models(mod4b, priors = FALSE, regcoef = FALSE, otherpars = FALSE)
```

Normal imputation model for 'WC'

* Predictor variables:

(Intercept), age, genderfemale

Normal imputation model for 'bili'

* Predictor variables:

(Intercept), age, genderfemale, $I(WC^2)$

Incomplete variables are always imputed on their original scale, i.e., in `mod2b` the variable `bili` is imputed and the quadratic and cubic versions calculated from the imputed values. Likewise, `creat` and `albu` in `mod2c` are imputed separately, and $I(creat/albu^2)$ calculated from the imputed (and observed) values. To assure consistency between variables, functions involving incomplete variables should be specified as part of the model formula and not be pre-calculated as separate variables.

5.2. Multi level structure and longitudinal covariates

In multi-level models, additional to the fixed effects structure specified by the argument `fixed`, a random effects structure needs to be provided via the argument `random`.

Analogously to the specification of the argument `random` in `lme()`, it takes a one-sided formula starting with a `~`, and the grouping variable is separated by `|`. A random intercept is added automatically and only needs to be specified in a random intercept only model.

A few examples:

- `random = ~1 | id`: random intercept only, with `id` as grouping variable
- `random = ~time | id`: random intercept and slope for variable `time`

- `random = ~time + I(time^2)`: random intercept, slope and quadratic random effect for time
- `random = ~time + x | id`: random intercept, random slope for time and random effect for variable x

It is possible to use splines in the random effects structure if there are no missing values in the variables involved, e.g.:

```
R> mod5 <- lme_imp(bmi ~ GESTBIR + ETHN + HEIGHT_M + ns(age, df = 2),
R>                  random = ~ ns(age, df = 2) | ID, data = simLong)
```

Longitudinal (“time-varying”; level-1) covariates can be used in the fixed or random effects and will be imputed if they contain any missing values. Currently, only one level of nesting is possible.

5.3. Survival models

JointAI provides two functions to analyse survival data with incomplete covariates: `survreg_imp()` and `coxph_imp()`. Analogous to the complete data versions of these functions from the package **survival**, the left hand side of the model formula has to be a survival object specified using the function `Surv()`.

Example: To analyse the `lung` data, we can either use a parametric Weibull model or a Cox proportional hazards model. The **survival** package needs to be loaded for the function `Surv()`.

```
R> library(survival)
R> mod6a <- survreg_imp(Surv(time, status) ~ age + sex + ph.karno + meal.cal +
R>                      wt.loss, data = lung, n.iter = 250)
R>
R> mod6b <- coxph_imp(Surv(time, status) ~ age + sex + ph.karno + meal.cal +
R>                    wt.loss, data = lung, n.iter = 250)
```

Currently only right-censored survival data and time-constant covariates can be handled and it is not yet possible to take into account strata, clustering or frailty terms.

5.4. Imputation / covariate model types

JointAI automatically selects an (imputation) model for each of the incomplete baseline (level-2) or longitudinal (level-1) covariates, based on the `class` of the variable and the number of levels. The automatically selected types for baseline covariates are:

- `norm`: linear model (for continuous variables)
- `logit`: binary logistic model (for factors with two levels)
- `multilogit`: multinomial logit model (for unordered factors with > 2 levels)
- `cumlogit`: cumulative logit model (for ordered factors with > 2 levels)

The default methods for longitudinal covariates are:

- `lmm`: linear mixed model (for continuous longitudinal variables)
- `glmm_logit`: logistic mixed model (for longitudinal factors with two levels)
- `clmm`: cumulative logit mixed model (for longitudinal ordered factors with >2 levels)

When a continuous variable has only two different values, it is automatically converted to a factor and imputed using a logistic model, unless an imputation model type is specified by the user. Variables of type `logical` are automatically converted to binary factors.

The imputation models that are chosen by default may not necessarily be appropriate for the data at hand, especially for continuous variables, which often do not comply with the assumptions of (conditional) normality.

Therefore, the following alternative imputation methods are available for continuous baseline covariates:

- `lognorm`: normal model for the log-transformed variable (for right-skewed variables > 0)
- `gamma`: gamma model with log-link (for right-skewed variables > 0)
- `beta`: beta model with logit-link (for continuous variables with values in [0, 1])

`lognorm` assumes a (conditional) normal distribution for the natural logarithm of the variable, but the variable enters the linear predictor of the analysis model (and possibly other imputation models) on its original scale.

For longitudinal covariates the following alternative model types are available:

- `glmm_gamma`: gamma mixed model with log-link (for right-skewed variables > 0)
- `glmm_poisson`: Poisson mixed model with log-link (for count variables)

Specification of imputation model types

In models `mod3b` and `mod3c` in Section 5.1.3 we have already seen two examples in which the imputation model type was changed using the argument `models`. This argument takes a named vector of (imputation) model types, where the names are names of incomplete covariates and longitudinal covariates. When the vector supplied to `models` only contains specifications for a subset of the incomplete and longitudinal covariates, default models are used for the remaining covariates. As explained in Section 2.2.1, models for completely observed longitudinal covariates only need to be specified when any baseline covariates have missing values.

```
R> mod7a <- lm_imp(SBP ~ age + gender + WC + alc + bili + occup + smoke,
R+               models = c(WC = 'gamma', bili = 'lognorm'),
R+               data = NHANES, n.iter = 100)
R>
R> mod7a$models
```

WC	smoke	bili	occup	alc
"gamma"	"cumlogit"	"lognorm"	"multilogit"	"logit"

The function `get_models()`, which finds and assigns the default imputation methods, can be called directly. `get_models()` has arguments

- **fixed**: the fixed effects formula
- **random**: the random effects formula (if necessary)
- **data**: the dataset
- **auxvars**: an optional vector of auxiliary variables
- **no_model**: an optional vector of names of covariates for which no model will be specified

```
R> mod7b_models <- get_models(bmi ~ GESTBIR + ETHN + HEIGHT_M + SMOKE + hc +
R+                               MARITAL + ns(age, df = 2),
R+                               random = ~ ns(age, df = 2) | ID, data = simLong)
R> mod7b_models
```

```
$models
      HEIGHT_M      ETHN      MARITAL      SMOKE      age
      "norm"      "logit" "multilogit" "cumlogit" "lmm"
      hc
      "lmm"
```

```
$meth
      HEIGHT_M      ETHN      MARITAL      SMOKE      hc
      "norm"      "logit" "multilogit" "cumlogit" "lmm"
```

`get_models()` returns a list of two vectors:

- **models**: containing all specified models
- **meth**: containing the models for the incomplete variables only

When there is a “time” variable in the model, such as **age** in our example (which is the age of the child at the time of the measurement), it may not be meaningful to specify a model for that variable. Especially when the “time” variable is pre-specified by the design of the study it can usually be assumed to be independent of the covariates and a model for it has no useful interpretation.

The argument **no_model** (in `get_models()` as well as in the main functions `*_imp()`) allows to exclude models for such variables (as long as they are completely observed):

```
R> mod7c_models <- get_models(bmi ~ GESTBIR + ETHN + HEIGHT_M + SMOKE + hc +
R+                               MARITAL + ns(age, df = 2),
R+                               random = ~ ns(age, df = 2) | ID, data = simLong,
R+                               no_model = "age")
R> # mod7c_models
```

By excluding the model for **age** we implicitly assume that incomplete baseline variables are independent of **age**.

Order of the sequence of imputation models

By default, models for level-1 covariates are specified after models for level-2 covariates, so that the level-2 covariates are used as predictor variables in the models for level-1 covariates but not vice versa. Within the two groups, models are ordered by the number of missing values (decreasing), so that the model for the variable with the most missing values has the most variables in its linear predictor.

5.5. Auxiliary variables

Auxiliary variables are variables that are not part of the analysis model but should be considered as predictor variables in the imputation models because they can inform the imputation of unobserved values.

Good auxiliary variables are ([Van Buuren 2012](#))

- associated with an incomplete variable of interest, or are
- associated with the missingness of that variable and
- do not have too many missing values themselves. Importantly, they should be observed for a large proportion of the cases that have a missing value in the variable to be imputed.

In `*_imp()`, auxiliary variables can be specified with the argument `auxvars`, which is a vector containing the names of the auxiliary variables.

Example: We might consider the variables `educ` and `smoke` as predictors for the imputation of `occup`:

```
R> mod8a <- lm_imp(SBP ~ gender + age + occup, auxvars = c('educ', 'smoke'),
R+ data = NHANES, n.iter = 100)
```

The variables `educ` and `smoke` are not included in the analysis model (as can be seen when printing the posterior mean of the regression coefficients of the analysis model with `coef()`):

```
R> coef(mod8a)
```

	(Intercept)	genderfemale	age
	105.4214517	-5.6012730	0.3802840
occup	looking for work	occupnot working	
	3.7994319	-0.7950919	

They are, however, used as predictors in the imputation for `occup` and imputed themselves (if they have missing values):

```
R> list_models(mod8a, priors = FALSE, regcoef = FALSE, otherpars = FALSE,
R+ refcat = FALSE)
```


Cumulative logit imputation model for 'smoke'

```
* Predictor variables:
  genderfemale, age, educhigh
```

Multinomial logit imputation model for 'occup'

```
* Predictor variables:
  (Intercept), genderfemale, age, educhigh, smokeformer, smokecurrent
```

Functions of variables as auxiliary variables

As shown above in `mod3e`, it is possible to specify functions of auxiliary variables. In that case, the auxiliary variable is not considered as a linear effect but as specified by the function. Note that omitting auxiliary variables from the analysis model implies that the outcome is independent of these variables, conditional on the other variables in the model. If this is not true, the model is misspecified which may lead to biased results (similar to leaving a confounding variable out of a model).

5.6. Reference values for categorical covariates

In **JointAI**, dummy coding is used when categorical variables enter a linear predictor, i.e., a binary variable is created for each category, except the reference category. These binary variables have value one when that category was observed and zero otherwise. Contrary to the behaviour in base R, this coding is also used for ordered factors. It is not possible to change this behaviour by changing the contrasts specification in the base R `options()`.

By default, the first category of a categorical variable (ordered or unordered) is used as reference, however, this may not always allow the desired interpretation of the regression coefficients. Moreover, when categories are unbalanced, setting the largest group as reference may result in better mixing of the MCMC chains. Therefore, **JointAI** allows specification of the reference category separately for each variable, via the argument `refcats`. Changes in `refcats` will not impact the imputation of the respective variable, but change categories for which dummy variables are included in the linear predictor of the analysis model or other covariate models.

Setting reference categories for all variables

To specify the choice of reference category globally for all variables in the model, `refcats` can be set as

- `refcats = "first"`
- `refcats = "last"`
- `refcats = "largest"`

For example:

```
R> mod9a <- lm_imp(SBP ~ gender + age + race + educ + occup + smoke,
R+               refcats = "largest", data = NHANES)
```

Setting reference categories for individual variables

Alternatively, `refcats` takes a named vector, in which the reference category for each variable can be specified either by its number or its name, or one of the three global types: "first", "last" or "largest". For variables for which no reference category is specified in the list the default is used.

```
R> mod9b <- lm_imp(SBP ~ gender + age + race + educ + occup + smoke,
R+               refcats = list(occup = "not working", race = 3,
R+                             educ = 'largest'), data = NHANES)
```

To facilitate specification of the reference categories, the function `set_refcat()` can be used. It prints the names of the categorical variables that are selected by

- a specified model formula (using the argument `formula`) and/or
- a vector of auxiliary variables (using the argument `auxvars`), or
- a vector naming covariates (using the argument `covars`)

or all categorical variables in the data if only the argument `data` is provided, and asks a number of questions which the user needs to reply to via input of a number.

```
R> refs_mod9 <- set_refcat(NHANES, formula = formula(mod9b))
```

The categorical variables are:

```
- "gender"
- "race"
- "educ"
- "occup"
- "smoke"
```

How do you want to specify the reference categories?

- 1: Use the first category for each variable.
- 2: Use the last category for each variable.
- 3: Use the largest category for each variable.
- 4: Specify the reference categories individually.

When option 4 is chosen, a question for each categorical variable is asked, for example:

```
R> #> The reference category for "race" should be
R> #>
R> #> 1: Mexican American
R> #> 2: Other Hispanic
R> #> 3: Non-Hispanic White
R> #> 4: Non-Hispanic Black
R> #> 5: other
```

After specification of the reference categories for all categorical variables, the determined specification for the argument `refcats` is printed:

```
R> #> In the JointAI model specify:
R> #> refcats = c(gender = 'female', race = 'Non-Hispanic White',
R> #>                educ = 'low', occup = 'not working', smoke = 'never')
R> #>
R> #> or use the output of this function.
```

`set_refcat()` also returns a named vector that can be passed to the argument `refcats`:

```
R> mod9c <- lm_imp(SBP ~ gender + age + race + educ + occup + smoke,
R+                refcats = refs_mod9, data = NHANES)
```

5.7. Hyperparameters

In the Bayesian framework, parameters are random variables for which a distribution needs to be specified. These distributions depend on parameters themselves, i.e., on hyperparameters. The function `default_hyperpars()` returns a list containing the default hyperparameters used in a **JointAI** model (see Appendix A). To change the hyperparameters in a **JointAI** model, this list can be edited and passed to the argument `hyperpars` in `*_imp()`.

`mu_reg_*` and `tau_reg_*` refer to the mean and precision of the prior distribution for regression coefficients. `shape_tau_*` and `rate_tau_*` are the shape and rate parameters of a gamma distribution that is used as prior for precision parameters. `RinvD` is the scale matrix in the Wishart prior for the inverse of the random effects design matrix D , and `KinvD` is the number of degrees of freedom in that distribution. `shape_diag_RinvD` and `rate_diag_RinvD` are the shape and rate parameters of the gamma prior of the diagonal elements of `RinvD`. In random effects models with only one random effect, a gamma prior is used instead of the Wishart distribution for the inverse of D .

The hyperparameters `mu_reg_surv` and `tau_reg_surv` are used in `survreg_imp()` as well as `coxph_imp()`. For the Cox proportional hazards model, the hyperparameters `c`, `r` and `eps` refer to the confidence in the prior guess for the hazard function, failure rate per unit time ($\lambda_0(t)^*$ in Section 2.1) and time increment (for numerical stability), respectively.

5.8. Scaling

When variables are measured on very different scales this can result in slow convergence and bad mixing. Therefore, **JointAI** automatically scales continuous variables to have mean zero and standard deviation one. Results (parameters and imputed values) are transformed back to the original scale when the results are printed or imputed values are exported.

In some settings, however, it is not possible to scale continuous variables. This is the case for those incomplete variables that enter a linear predictor in a function and for incomplete variables that are imputed with models that are defined on a subset of the real line (i.e., with a gamma or a beta distribution). Variables that are imputed with a log-normal distribution are scaled, but not centred.

To prevent scaling, the argument `scale_vars` can be set to `FALSE`. When a vector of variable names is supplied to `scale_vars`, only those variables are scaled.

By default, only the MCMC samples that are scaled back to the scale of the data are stored in a `JointAI` object. When the argument `keep_scaled_mcmc = TRUE`, the scaled sample is also kept.

5.9. Ridge regression

Using the argument `ridge = TRUE` it is possible to impose a ridge penalty on the coefficients of the analysis model, shrinking these parameters towards zero. This is done by specification of a $\text{Gamma}(0.01, 0.01)$ prior for the precision of the regression coefficients β instead of setting it to a fixed (small) value.

5.10. JAGS model file

Using the user-specified settings described above, **JointAI** will write the JAGS model. By default, the model is written to a temporary file and deleted afterwards. When the argument `keep_model` is set to `TRUE` the model file will be kept. Arguments `modelname` and `modeldir` allow the user to specify the name of the file (including the ending, e.g., `.R` or `.txt`) and the file location. When a file with that same name already exists in the given location, a question is prompted giving the user the option to use the existing file or to overwrite it. To prevent the question, the argument `overwrite` can be set to `TRUE`, or to `FALSE`.

This functionality enables the user to make changes to the JAGS model that is created automatically by **JointAI**.

6. MCMC settings

The functions `*_imp()` have a number of arguments that specify settings for the MCMC sampling:

- `n.chains`: number of MCMC chains
- `n.adapt`: number of iterations in the adaptive phase
- `n.iter`: number of iterations in the sampling phase
- `thin`: thinning degree
- `monitor_params`: parameters/nodes to be monitored
- `seed`: optional seed value for reproducibility
- `inits`: initial values
- `parallel`: whether MCMC chains should be sampled in parallel
- `ncores`: how many cores are available for parallel sampling

The first four, as well as the following two parameters, are passed directly to functions from the R package **rjags**:

- `quiet`: should printing of information be suppressed?
- `progress.bar`: type of progress bar (`"text"`, `"gui"` or `"none"`)

In the following sections, the arguments listed above are explained in more detail and examples are given.

6.1. Number of chains, iterations and samples

Number of chains

To evaluate convergence of MCMC chains it is helpful to create multiple chains that have different starting values. More information on how to evaluate convergence and the specification of initial values can be found in Sections 7.3.1 and 6.3 respectively.

The argument `n.chains` selects the number of chains (by default `n.chains = 3`). For calculating the model summary, multiple chains are merged.

Adaptive phase

JAGS has an adaptive mode, in which samplers are optimized (for example the step size is adjusted). Samples obtained during the adaptive mode do not form a Markov chain and are discarded. The argument `n.adapt` controls the length of this adaptive phase.

The default value for `n.adapt` is 100, which works well in many of the examples considered here. Complex models may require longer adaptive phases. If the adaptive phase is not sufficient for JAGS to optimize the samplers, a warning message will be printed (see example below).

Sampling iterations

`n.iter` specifies the number of iterations in the sampling phase, i.e., the length of the MCMC chain. How many samples are required to reach convergence and to have sufficient precision (see also Section 7.3.2) depends on the complexity of data and model, and may range from as few as 100 to several million.

Thinning

In settings with high autocorrelation, it may take many iterations before a sample is created that sufficiently represents the whole range of the posterior distribution. Processing of such long chains can be slow and cause memory issues. The parameter `thin` allows the user to specify if and how much the MCMC chains should be thinned out before storing them. By default `thin = 1` is used, which corresponds to keeping all values. A value `thin = 10` would result in keeping every 10th value and discarding all other values.

Example: default settings Using the default settings `n.adapt = 100` and `thin = 1`, and 100 sampling iterations, a simple model would be

```
R> mod10a <- lm_imp(SBP ~ alc, data = NHANES, n.iter = 100)
```

The relevant part of the model summary (obtained with `summary()`) shows that the first 100 iterations (adaptive phase) were discarded, the 100 iterations that follow form the posterior sample, thinning was set to “1” and there are three chains.

```
[...]
MCMC settings:
Iterations = 101:200
Sample size per chain = 100
Thinning interval = 1
Number of chains = 3
```

Example: insufficient adaptation phase

```
R> mod10b <- lm_imp(SBP ~ alc, data = NHANES, n.adapt = 10, n.iter = 100)
```

```
Warning in rjags::jags.model(file = modelfile, data = data_list, inits
= inits, : Adaptation incomplete
```

NOTE: Stopping adaptation

Specifying `n.adapt = 10` results in a warning message. The relevant part of the model summary from the resulting model is:

```
[...]
Iterations = 11:110
Sample size per chain = 100
Thinning interval = 1
Number of chains = 3
```

Example: thinning

```
R> mod10c <- lm_imp(SBP ~ alc, data = NHANES, n.iter = 500, thin = 10)
```

Here, iterations 110 until 600 are used in the output, but due to a thinning interval of ten, the resulting MCMC chains contain only 50 samples instead of 500, that is, the samples from iteration 110, 120, 130, ...

```
[...]
Iterations = 110:600
Sample size per chain = 50
Thinning interval = 10
Number of chains = 3
```

6.2. Parameters to follow

Since **JointAI** uses JAGS ([Plummer 2003](#)) for performing the MCMC sampling, and JAGS only saves the values of MCMC chains for those nodes for which the user has specified that they should be monitored, this is also the case in **JointAI**.

For this purpose, the main functions `*_imp()` have an argument `monitor_params`, which takes a named list (or a named vector) with possible entries given in [Table 2](#). This table

Table 2: Key words and names of (groups of) nodes that can be specified to be monitored using the argument `monitor_params`.

name/key word	what is monitored
<code>analysis_main</code>	<code>betas</code> and <code>sigma_y</code> (and <code>D</code>)
<code>betas</code>	regression coefficients of the analysis model
<code>tau_y</code>	precision of the residuals from the analysis model
<code>sigma_y</code>	standard deviation of the residuals from the analysis model
<code>analysis_random</code>	<code>ranef</code> , <code>D</code> , <code>invD</code> , <code>RinvD</code>
<code>ranef</code>	random effects
<code>D</code>	covariance matrix of the random effects
<code>invD</code>	inverse of <code>D</code>
<code>RinvD</code>	scale matrix in Wishart prior for <code>invD</code>
<code>imp_pars</code>	<code>alphas</code> , <code>tau_imp</code> , <code>gamma_imp</code> , <code>delta_imp</code>
<code>alphas</code>	regression coefficients in the imputation models
<code>tau_imp</code>	precision parameters of the residuals from imputation models
<code>gamma_imp</code>	intercepts in ordinal imputation models
<code>delta_imp</code>	increments of ordinal intercepts
<code>imps</code>	imputed values
<code>other</code>	additional parameters

contains a number of keywords that refer to (groups of) nodes. Each of the keywords works as a switch and can be specified as `TRUE` or `FALSE` (with the exception of `other`).

Parameters of the analysis model

The default setting is `monitor_params = c(analysis_main = TRUE)`, i.e., only the main parameters of the analysis model are monitored, and monitoring is switched off for all other parameters. Main parameters are the regression coefficients of the analysis model (`beta`), depending on the model type, the residual standard deviation (`sigma_y`), and, for mixed models, the random effects variance-covariance matrix `D`.

The function `parameters()` returns the parameters specified to be followed (also for models where no MCMC sampling was performed, i.e., when `n.iter = 0` and `n.adapt = 0`). We use it here to demonstrate the effect that different choices for `monitor_params` have. For example:

```
R> mod11a <- lm_imp(SBP ~ gender + WC + alc + creat, data = NHANES,
R+               n.adapt = 0)
R>
R> parameters(mod11a)

[1] "(Intercept)" "genderfemale" "WC"           "alc>=1"
[5] "creat"       "sigma_SBP"
```


Parameters of the imputation models and imputed values

The parameters of the models for incomplete variables can be selected with `monitor_params = c(imp_pars = TRUE)`. This will set monitors for the vector of regression coefficients (`alpha`) and other parameters, such as precision (`tau_*`) and intercepts and increments (`gamma_*` and `delta_*`) in cumulative logit models.

```
R> mod11b <- lm_imp(SBP ~ age + WC + alc + smoke + occup,
R+                  data = NHANES, n.adapt = 0,
R+                  monitor_params = c(imp_pars = TRUE, analysis_main = FALSE)
R+ )
R>
R> parameters(mod11b)
```

```
[1] "alpha"      "tau_WC"      "gamma_smoke" "delta_smoke"
```

To generate (multiple) imputed datasets to be used for further analyses, the imputed values need to be monitored. This can be achieved by setting `monitor_params = c(imps = TRUE)`.

```
R> mod11c <- lm_imp(SBP ~ age + WC + alc + smoke + occup,
R+                  data = NHANES, n.adapt = 0,
R+                  monitor_params = c(imps = TRUE, analysis_main = FALSE))
```

Extraction of multiple imputed datasets from a **JointAI** model is described in Section 7.6.

Random effects

For mixed models, `analysis_main` also includes the random effects variance-covariance matrix `D`. Setting `analysis_random = TRUE` will switch on monitoring for the random effects (`ranef`), random effects variance-covariance matrix (`D`), inverse of the random effects variance-covariance matrix (`invD`) and the diagonal of the scale matrix of the Wishart-prior of `invD` (`RinvD`).

```
R> mod11d <- lme_imp(bmi ~ age + EDUC, random = ~age | ID,
R+                  data = simLong, n.adapt = 0,
R+                  monitor_params = c(analysis_random = TRUE))
R>
R> parameters(mod11d)
```

```
[1] "(Intercept)" "EDUCmid"      "EDUClow"      "age"
[5] "sigma_bmi"    "b"            "invD[1,1]"    "invD[1,2]"
[9] "invD[2,2]"    "D[1,1]"       "D[1,2]"       "D[2,2]"
[13] "RinvD[1,1]"   "RinvD[2,2]"
```

It is possible to select only a subset of the random effects parameters by specifying them directly, e.g.,

```
R> mod11e <- lme_imp(bmi ~ age + EDUC, random = ~age | ID,
R+                  data = simLong, n.adapt = 0,
R+                  monitor_params = c(analysis_main = TRUE, RinvD = TRUE))
R>
R> parameters(mod11e)

[1] "(Intercept)" "EDUCmid"      "EDUClow"      "age"
[5] "sigma_bmi"   "D[1,1]"       "D[1,2]"       "D[2,2]"
[9] "RinvD[1,1]"  "RinvD[2,2]"
```

or by switching unwanted parts of `analysis_random` off, e.g.,

```
R> mod11f <- lme_imp(bmi ~ age + EDUC, random = ~age | ID, data = simLong,
R+                  n.adapt = 0, monitor_params = c(analysis_main = TRUE,
R+                                                  analysis_random = TRUE,
R+                                                  RinvD = FALSE,
R+                                                  ranef = FALSE))
R>
R> parameters(mod11f)

[1] "(Intercept)" "EDUCmid"      "EDUClow"      "age"
[5] "sigma_bmi"   "invD[1,1]"    "invD[1,2]"    "invD[2,2]"
[9] "D[1,1]"      "D[1,2]"      "D[2,2]"
```

Other parameters

The element `other` in `monitor_params` allows for the specification of one or multiple additional parameters to be monitored. When `other` is used with more than one element, `monitor_params` has to be a list.

Here, as an example, we monitor the probability of being in the `alc>=1` group for subjects one through three and the expected value of the distribution of `creat` for the first subject.

```
R> mod11g <- lm_imp(SBP ~ gender + WC + alc + creat, data = NHANES,
R+                  n.adapt = 0,
R+                  monitor_params = list(analysis_main = FALSE,
R+                                       other = c('p_alc[1:3]',
R+                                                  "mu_creat[1]")))
R>
R> parameters(mod11g)

[1] "p_alc[1:3]" "mu_creat[1]"
```

Even though this example may not be particularly meaningful, in cases of convergence issues it can be helpful to be able to monitor any node of the model, not just the ones that are typically of interest.

6.3. Initial values

Initial values are the starting point for the MCMC sampler. Setting good initial values, i.e., values that are likely under the posterior distribution, can speed up convergence. By default, the argument `inits = NULL`, which means that initial values are generated automatically by JAGS. It is also possible to supply initial values directly as a list or as a function.

Initial values can be specified for every unobserved node, that is, parameters and missing values, but it is possible to specify initial values for a subset of nodes.

When the initial values provided by the user do not have elements named `".RNG.name"` or `".RNG.seed"`, **JointAI** will add those elements, which specify the name and seed value of the random number generator used for each chain.

The argument `seed` allows the specification of a seed value with which the starting values of the random number generator, and, hence, the values of the MCMC sample, can be reproduced.

Initial values in a list of lists

A list containing initial values should have the same length as the number of chains, where each element is a named list of initial values. Moreover, initial values should differ between the chains.

For example, to create initial values for the parameter vector `beta` and the precision parameter `tau_SBP` for two chains the following syntax could be used:

```
R> init_list <- lapply(1:2, function(i) {
R+   list(beta = rnorm(4),
R+         tau_SBP = rgamma(1, 1, 1))
R+ })
R>
R> init_list

[[1]]
[[1]]$beta
[1]  2.4250125 -0.2312878 -0.8591082 -0.1583861

[[1]]$tau_SBP
[1] 0.9726175

[[2]]
[[2]]$beta
[1] -0.4322497 -1.4529616 -1.0081017 -0.2995691

[[2]]$tau_SBP
[1] 0.2421945

R> mod12a <- lm_imp(SBP ~ gender + age + WC, data = NHANES, n.chain = 2,
R+                   inits = init_list)
```

The user provided lists of initial values (and starting values for the random number generator) are stored in the `JointAI` object and can be accessed via `mod11a$mcmc_settings$inits`.

Initial values as a function

Initial values can be specified as a function. The function should either take no arguments or a single argument called `chain`, and return a named list that supplies values for one chain.

For example, to create initial values for the parameter vectors `beta` and `alpha`:

```
R> inits_fun <- function() {
R+   list(beta = rnorm(4),
R+         alpha = rnorm(3))
R+ }
R>
R> inits_fun()

$beta
[1] -0.6490549 -1.0011724  1.6468426 -0.4935679

$alpha
[1] -0.3324592  1.3605222 -0.1426302

R> mod12b <- lm_imp(SBP ~ gender + age + WC, data = NHANES, inits = inits_fun)
R>
R> mod12b$mcmc_settings$inits

[[1]]
[[1]]$beta
[1]  2.51457934  0.04570001 -0.53441725 -0.99410125

[[1]]$alpha
[1] 0.9641936 0.6882097 0.8931279

[[1]]$.RNG.name
[1] "base::Wichmann-Hill"

[[1]]$.RNG.seed
[1] 42957

[[2]]
[[2]]$beta
[1]  0.67120401 -0.04653613  0.00474783  1.07802256

[[2]]$alpha
[1] -0.6815119  1.5621523  0.3170240
```

```

[[2]]$.RNG.name
[1] "base::Wichmann-Hill"

[[2]]$.RNG.seed
[1] 8538

[[3]]
[[3]]$beta
[1] -0.2487785 -1.4087149  1.0774031 -0.3458381

[[3]]$alpha
[1] -1.07316722  0.09532357 -0.71013073

[[3]]$.RNG.name
[1] "base::Marsaglia-Multicarry"

[[3]]$.RNG.seed
[1] 38694

```

When a function is supplied, the function is evaluated by **JointAI** and the resulting **list** is stored in the **JointAI** object.

For which nodes can initial values be specified?

Initial values can be specified for all unobserved stochastic nodes, i.e., parameters or unobserved data for which a distribution is specified in the **JAGS** model. They have to be supplied in the format of the parameter or unobserved value in the **JAGS** model. To find out which nodes there are in a model and in which form they have to be specified, the function **coef()** from package **rjags** can be used to obtain a list with the current values of the MCMC chains (by default the first chain) from a **JAGS** model object. This object is contained in a **JointAI** object under the name **model**. Elements of the initial values should have the same structure as the elements in this list of current values.

Example: We are using a longitudinal model and the **simLong** data in this example. Here we only show some relevant parts of the output.

```

R> mod12c <- lme_imp(bmi ~ time + HEIGHT_M + hc + SMOKE, random = ~ time | ID,
R>                    no_model = 'time', data = simLong)
R>
R> # coef(mod12c$model)

```

RinvD is the scale matrix in the Wishart prior for the inverse of the random effects variance-covariance matrix **D**. In the data that is passed to **JAGS** (which is stored in the element **data_list** in a **JointAI** object), this matrix is specified as a diagonal matrix, with unknown diagonal elements:

```
R> mod12c$data_list['RinvD']
```

```
$RinvD
      [,1] [,2]
[1,]   NA    0
[2,]    0   NA
```

These diagonal elements are estimated in the model and have a gamma prior. The corresponding part of the JAGS model is:

```
[...]
# Priors for the covariance of the random effects
for (k in 1:2){
  RinvD[k, k] ~ dgamma(shape_diag_RinvD, rate_diag_RinvD)
}
invD[1:2, 1:2] ~ dwish(RinvD[ , ], KinvD)
D[1:2, 1:2] <- inverse(invD[ , ])
[...]
```

The element `RinvD` in the initial values has to be a 2×2 matrix, with positive values on the diagonal and NA as off-diagonal elements, since these are fixed in the data:

```
$RinvD
      [,1]      [,2]
[1,] 0.9518712      NA
[2,]      NA 0.06565843
```

Lines 82 through 85 of the design matrix of the fixed effects of baseline covariates, `Xc`, in the data are:

```
R> mod12c$data_list$Xc[82:85, ]
```

```
      (Intercept) HEIGHT_M SMOKEsmoked until[...] SMOKEcontin[...]
172.1           1 0.1148171           NA           NA
173.1           1      NA           NA           NA
174.1           1 0.5045126           NA           NA
175.1           1 1.8822249           NA           NA
```

The matrix `Xc` in the initial values has the same dimension as `Xc` in the data. It has values where there are missing values in `Xc` in the data, e.g., `Xc[83, 2]`, and is NA elsewhere:

```
$Xc
      [,1]      [,2] [,3] [,4]
[1,]   NA      NA   NA   NA

[...]
```

```
[82,] NA NA NA NA
[83,] NA 0.0763428 NA NA
[84,] NA NA NA NA
```

```
[...]
```

There are no initial values specified for the third and fourth column, since these columns contain the dummy variables corresponding to the categorical variable **SMOKE** and are calculated from the corresponding column in the matrix **Xcat**, i.e., these are deterministic nodes, not stochastic nodes.

The relevant part of the JAGS model is:

```
[...]
# ordinal model for SMOKE
Xcat[i, 1] ~ dcat(p_SMOKE[i, 1:3])
[...]
Xc[i, 3] <- ifelse(Xcat[i, 1] == 2, 1, 0)
Xc[i, 4] <- ifelse(Xcat[i, 1] == 3, 1, 0)
[...]
```

Elements that are completely unobserved, like the parameter vectors **alpha** and **beta**, the random effects **b** or scalar parameters **delta_SMOKE** and **gamma_SMOKE** are entirely specified in the initial values.

6.4. Parallel sampling

To reduce the computational time it is possible to perform sampling of multiple MCMC chains in parallel. This can be specified by setting the argument **parallel = TRUE**. The maximum number of cores to be used can be set with the argument **ncores**. By default this is two less than the number of cores available on the machine, but never more than the number of MCMC chains.

Parallel computation is done using the packages **foreach** (Microsoft and Weston 2017) and **doParallel** (Corporation and Weston 2018). Note that it is currently not possible to display a progress bar when using parallel computation.

7. After fitting

Any of the main functions ***_imp()** will return an object of class **JointAI**. It contains the original data (**data**), information on the type of model (**call**, **analysis_type**, **models**, **fixed**, **random**, **hyperpars**, **scale_pars**) and MCMC sampling (**mcmc_settings**), the JAGS model (**model**) and MCMC sample (**MCMC**; if a sample was generated), the computational time (**time**) of the MCMC sampling, and some additional elements that are used by methods for objects of class **JointAI** but are typically not of interest for the user.

In the remaining part of this section, we describe how the results from a **JointAI** model can be visualized, summarized and evaluated. The functions described here use, by default, the

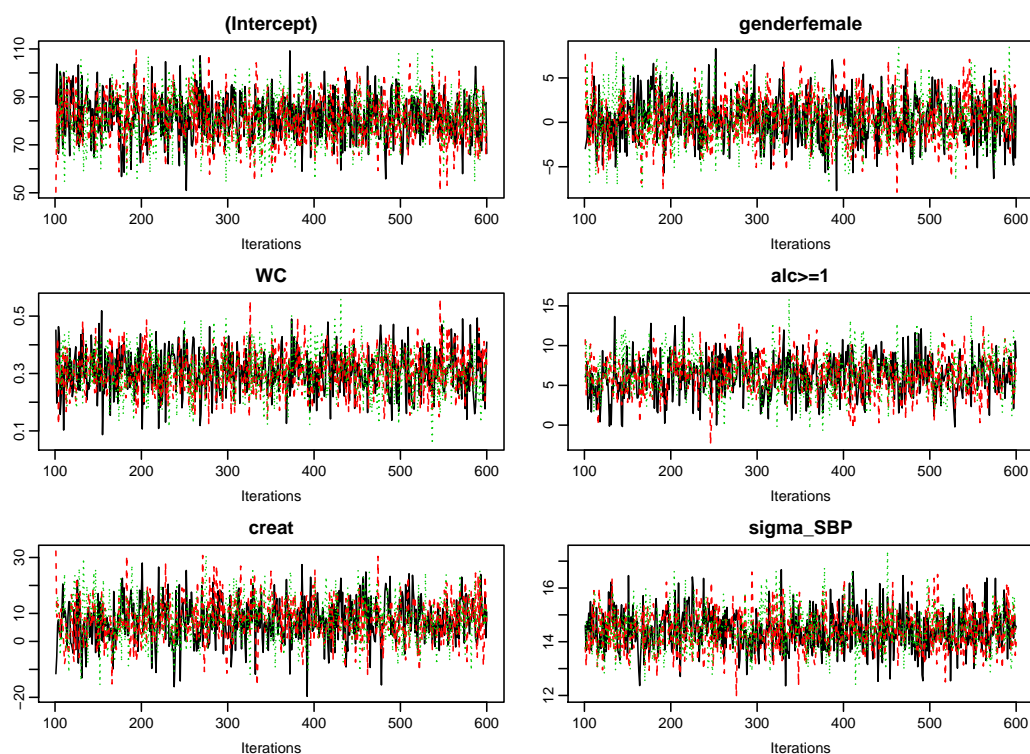


Figure 8: Traceplot of mod13a.

full MCMC sample and show only the parameters of the analysis model. Arguments `start`, `end` and `thin` are available to select a subset of the iterations of the MCMC sample that is used to calculate the summary. The argument `subset` allows the user to control for which nodes the summary or visualization is returned and follows the same logic as the argument `monitor_params` in `*_imp()`. The use of these arguments is further explained in Section 7.4.

7.1. Visualizing the posterior sample


The posterior sample can be visualized by two commonly used plots: a traceplot, showing samples across iterations, and a plot of the empirical density of the posterior sample.

Traceplot

A traceplot shows the sampled values per chain and node across iterations. It allows the visual evaluation of convergence and mixing of the chains and can be obtained with the function `traceplot()`.

```
R> mod13a <- lm_imp(SBP ~ gender + WC + alc + creat,
R+                  data = NHANES, n.iter = 500)
R>
R> traceplot(mod13a)
```

When the sampler has converged the chains show one horizontal band, as in Figure 8. Consequently, when traces show a trend, convergence has not been reached and more iterations

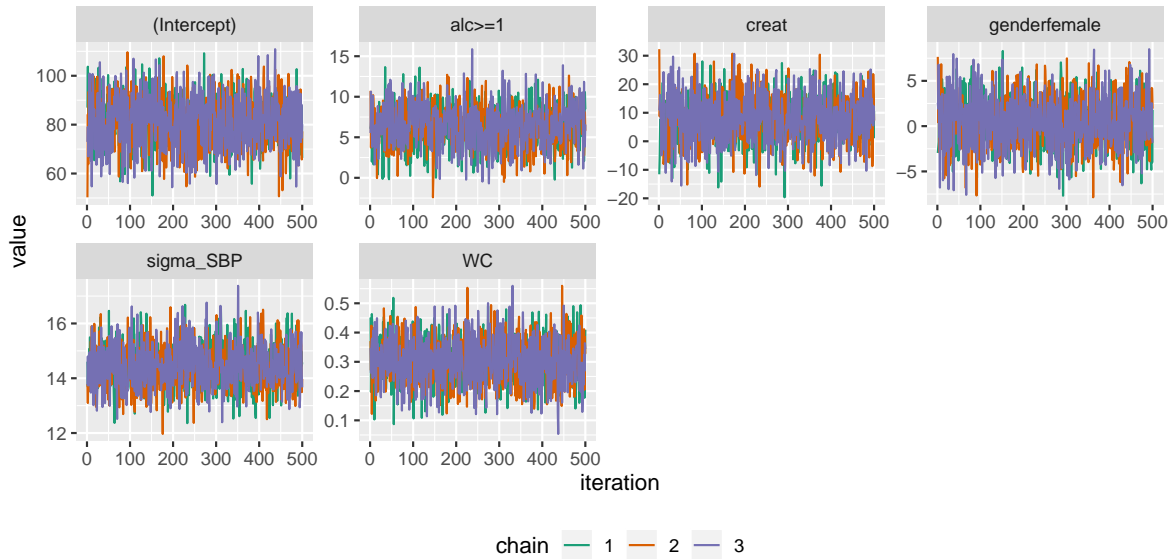Figure 9: **ggplot2** version of the traceplot for `mod13a`

are necessary (e.g., using `add_samples()`).

Graphical aspects of the traceplot can be controlled by specifying standard graphical arguments via the dots argument "...", which are passed to `matplot()`. This allows the user to change colour, linetype and -width, limits, etc. Arguments `nrow` and/or `ncol` can be supplied to set specific numbers of rows and columns for the layout of the grid of plots.



With the argument `use_ggplot` it is possible to get a **ggplot2** (Wickham 2016) version of the traceplot. It can be extended using standard **ggplot2** syntax. The output of the following syntax is shown in Figure 9.

```
R> library(ggplot2)
R> traceplot(mod13a, ncol = 4, use_ggplot = TRUE) +
R+   theme(legend.position = 'bottom') +
R+   scale_color_brewer(palette = 'Dark2')
```

Densityplot

The posterior distributions can also be visualized using the function `densplot()`, which plots the empirical density per node per chain, or combining chains (when `joined = TRUE`).

```
R> densplot(mod13a, ncol = 4,
R+         vlines = list(list(v = summary(mod13a)$stats[, "Mean"], lwd = 2),
R+                       list(v = summary(mod13a)$stats[, "2.5%"], lty = 2),
R+                       list(v = summary(mod13a)$stats[, "97.5%"], lty = 2)
R+         )
R+ )
```

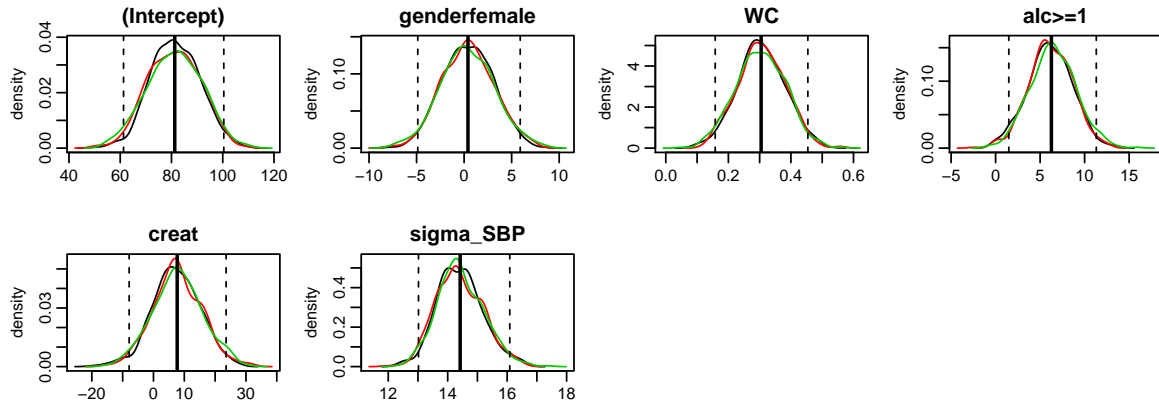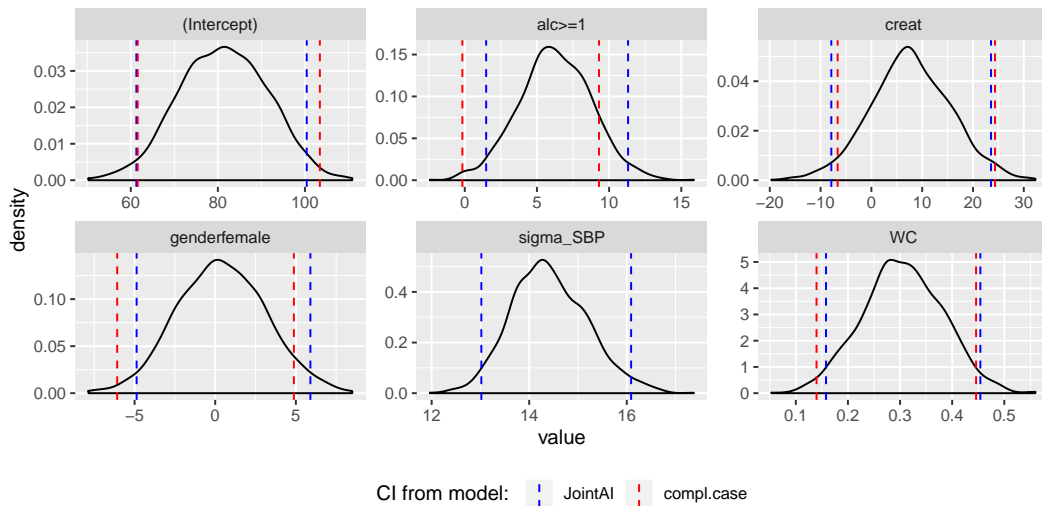Figure 10: Empirical posterior density of `mod13a`Figure 11: Density plot of model `mod13a`

The argument `vlines` takes a list of lists, containing specifications passed to the function `abline()` (from package **graphics** which is available with base R), and allows the addition of (vertical) lines to the plot, e.g., marking zero, or marking the posterior mean and 2.5% and 97.5% quantiles (Figure 10).

As with `traceplot()` it is possible to use the **ggplot2** version of `densplot()` when setting `use_ggplot = TRUE`. Here, vertical lines can be added as additional layers. Figure 11 shows, as an example, the posterior density from `mod13a` to which vertical lines, representing the 95% credible interval and a 95% confidence interval from a complete case analysis, are added. The corresponding syntax is given in Appendix B.

7.2. Model Summary

A summary of the posterior distribution estimated in a **JointAI** model can be obtained using the function `summary()`.

The posterior summary consists of the mean, standard deviation and quantiles (by default the 2.5% and 97.5% quantiles) of the MCMC samples from all chains combined, as well as the tail probability (see below) and Gelman-Rubin criterion (see Section 7.3.1).

Additionally, some important characteristics of the MCMC samples on which the summary is based, are given. This includes the range and number of iterations (**Sample size per chain**), thinning interval and number of chains. Furthermore, the number of observations (number of rows in the data) is printed.

```
R> summary(mod13a)
```

```
Linear model fitted with JointAI
```

```
Call:
```

```
lm_imp(formula = SBP ~ gender + WC + alc + creat, data = NHANES,
        n.iter = 500)
```

```
Posterior summary:
```

	Mean	SD	2.5%	97.5%	tail-prob.	GR-crit
(Intercept)	80.657	10.223	60.986	100.828	0.00000	1.00
genderfemale	0.465	2.603	-4.561	5.511	0.86533	1.01
WC	0.306	0.075	0.159	0.461	0.00000	1.00
alc>=1	6.466	2.403	1.688	10.875	0.00533	1.00
creat	8.146	7.758	-7.255	23.159	0.29600	1.01

```
Posterior summary of residual std. deviation:
```

	Mean	SD	2.5%	97.5%	GR-crit
sigma_SBP	14.3	0.765	13	15.9	1.04

```
MCMC settings:
```

```
Iterations = 101:600
Sample size per chain = 500
Thinning interval = 1
Number of chains = 3
```

```
Number of observations: 186
```

For mixed models, `summary()` also returns the posterior summary of the random effects covariance matrix D and the number of groups:

```
R> library(splines)
R> mod13b <- lme_imp(bmi ~ GESTBIR + ETHN + HEIGHT_M + ns(age, df = 3),
R+                  random = ~ ns(age, df = 3) | ID, data = simLong,
R+                  n.iter = 250)
R>
R> summary(mod13b)
```

Linear mixed model fitted with JointAI

Call:

```
lme_imp(fixed = bmi ~ GESTBIR + ETHN + HEIGHT_M + ns(age, df = 3),
       data = simLong, random = ~ns(age, df = 3) | ID, n.iter = 250)
```

Posterior summary:

	Mean	SD	2.5%	97.5%	tail-prob.	GR-crit
(Intercept)	16.44646	2.17613	12.1648	20.5376	0.000	1.02
GESTBIR	-0.03560	0.04522	-0.1313	0.0482	0.413	1.01
ETHNother	-0.00423	0.14535	-0.2933	0.2704	0.995	1.00
HEIGHT_M	0.00428	0.00928	-0.0145	0.0198	0.643	1.03
ns(age, df = 3)1	-0.10429	0.07463	-0.2540	0.0493	0.131	1.22
ns(age, df = 3)2	1.93515	0.22339	1.4949	2.3893	0.000	1.01
ns(age, df = 3)3	-1.19979	0.06575	-1.3273	-1.0728	0.000	1.03

Posterior summary of random effects covariance matrix:

	Mean	SD	2.5%	97.5%	tail-prob.	GR-crit
D[1,1]	1.547	0.1907	1.201	1.951		1.06
D[1,2]	-0.840	0.1268	-1.121	-0.608	0	1.21
D[2,2]	0.774	0.1376	0.544	1.071		1.97
D[1,3]	-2.791	0.4039	-3.609	-2.069	0	1.09
D[2,3]	2.557	0.3251	1.988	3.250	0	1.31
D[3,3]	8.728	1.0531	6.876	10.944		1.08
D[1,4]	-0.839	0.1163	-1.074	-0.626	0	1.16
D[2,4]	0.703	0.0889	0.539	0.896	0	1.15
D[3,4]	2.369	0.3017	1.799	2.958	0	1.17
D[4,4]	0.668	0.0942	0.497	0.849		1.27

Posterior summary of residual std. deviation:

	Mean	SD	2.5%	97.5%	GR-crit
sigma_bmi	0.441	0.00813	0.424	0.456	1

MCMC settings:

```
Iterations = 101:350
Sample size per chain = 250
Thinning interval = 1
Number of chains = 3
```

Number of observations: 2400

Number of groups: 200

The summary of parametric Weibull survival models also returns the summary of the posterior sample of the shape parameter of the Weibull distribution:

```
R> summary(mod6a)
```

```
Weibull survival model fitted with JointAI
```

```
Call:
```

```
survreg_imp(formula = Surv(time, status) ~ age + sex + ph.karno +
  meal.cal + wt.loss, data = lung, n.iter = 250)
```

```
Posterior summary:
```

	Mean	SD	2.5%	97.5%	tail-prob.	GR-crit
(Intercept)	5.64e+00	0.777796	4.187393	7.200982	0.0000	1.12
age	-9.49e-03	0.007788	-0.027332	0.004263	0.2293	1.10
sex2	3.95e-01	0.144924	0.129111	0.714331	0.0000	1.07
ph.karno	9.37e-03	0.004567	0.000031	0.018255	0.0453	1.02
meal.cal	7.21e-05	0.000184	-0.000285	0.000451	0.7280	1.16
wt.loss	2.03e-03	0.004624	-0.007126	0.010565	0.6427	1.02

```
Posterior summary of the shape of the Weibull distribution:
```

	Mean	SD	2.5%	97.5%	GR-crit
shape	1.29	0.0848	1.13	1.46	1.04

```
MCMC settings:
```

```
Iterations = 101:350
Sample size per chain = 250
Thinning interval = 1
Number of chains = 3
```

```
Number of observations: 228
```

Tail probability

The tail probability, calculated as $2 \times \min \{Pr(\theta > 0), Pr(\theta < 0)\}$, where θ is the parameter of interest, is a measure of how likely the value 0 is under the estimated posterior distribution. Figure 12 visualizes three examples of posterior distributions and the corresponding minimum of $Pr(\theta > 0)$ and $Pr(\theta < 0)$ (shaded area).

7.3. Evaluation criteria

Convergence of the MCMC chains and precision of the posterior sample can also be evaluated in a more formal manner. Implemented in **JointAI** are the Gelman-Rubin criterion for convergence (Gelman and Rubin 1992; Brooks and Gelman 1998) and a comparison of the Monte Carlo Error with the posterior standard deviation.

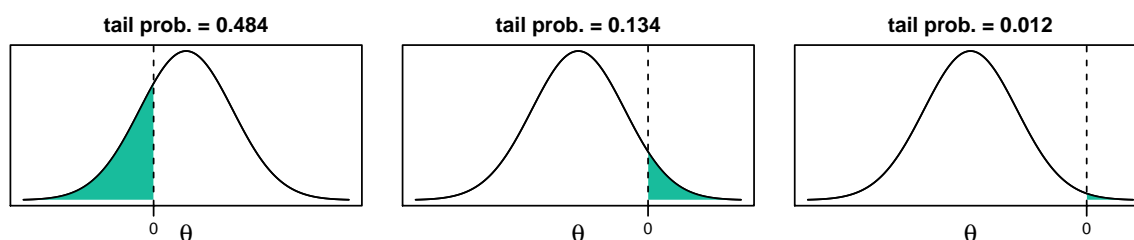


Figure 12: Visualization of the tail probability.

Gelman-Rubin criterion for convergence

The Gelman-Rubin criterion (Gelman and Rubin 1992; Brooks and Gelman 1998), also referred to as “potential scale reduction factor”, evaluates convergence by comparing within and between chain variability and, thus, requires at least two MCMC chains to be calculated. It is implemented for `JointAI` objects in the function `GR_crit()`, which is based on the function `gelman.diag()` from the package `coda` (Plummer, Best, Cowles, and Vines 2006). The upper limit of the confidence interval should not be much larger than 1.

```
R> GR_crit(mod13a)
```

Potential scale reduction factors:

	Point est.	Upper C.I.
(Intercept)	1.000	1.002
genderfemale	1.000	1.003
WC	1.001	1.003
alc>=1	1.000	1.003
creat	0.999	0.999
sigma_SBP	1.009	1.032

Multivariate psrf

1.01

Besides the arguments `start`, `end`, `thin`, and `subset` (explained in Section 7.4) `GR_crit()` also takes the arguments `confidence`, `transform` and `autoburnin` of `gelman.diag()`.

Monte Carlo Error

Precision of the MCMC sample can be checked with the function `MC_error()`. It uses the function `mcmcse.mat()` from the package `mcmcse` (Flegal, Hughes, Vats, and Dai 2017) to calculate the Monte Carlo error (the error that is made since the sample is finite) and compares it to the standard deviation of the posterior sample. A rule of thumb is that the Monte Carlo error should not be more than 5% of the standard deviation (Lesaffre and Lawson 2012). Besides the arguments explained in Section 7.4, `MC_error()` takes the arguments of `mcmcse.mat()`.

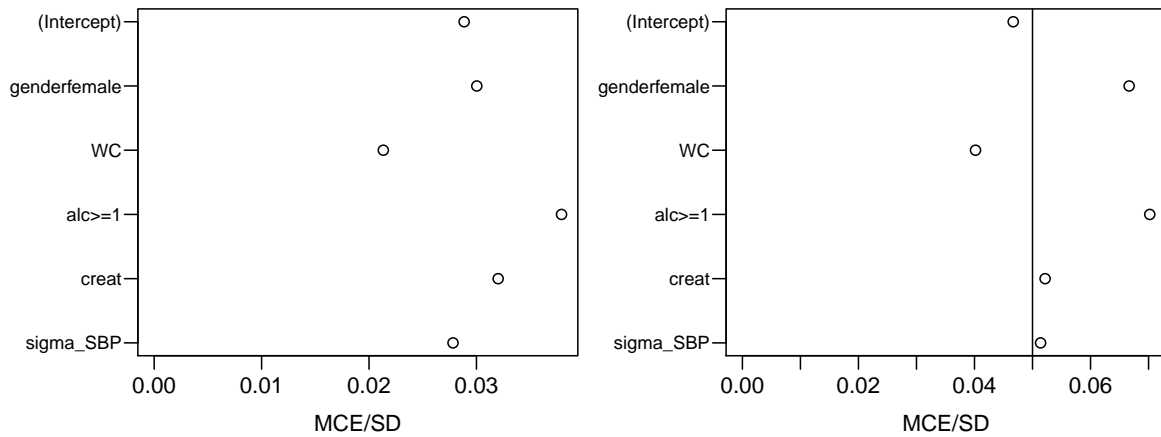


Figure 13: Plot of the `MCElist` object from `mod13a`. Left: including all iterations, right: using only the first 250 iterations of the MCMC sample.

```
R> MC_error(mod13a)
```

	est	MCSE	SD	MCSE/SD
(Intercept)	80.66	0.302	10.223	0.030
genderfemale	0.47	0.080	2.603	0.031
WC	0.31	0.002	0.075	0.026
alc>=1	6.47	0.067	2.403	0.028
creat	8.15	0.218	7.758	0.028
sigma_SBP	14.35	0.023	0.765	0.030

`MC_error()` returns an object of class `MCElist`, which is a list containing matrices with the posterior mean, estimated Monte Carlo error, posterior standard deviation and the ratio of the Monte Carlo error and posterior standard deviation, for the scaled (if this MCMC sample was included in the `JointAI` object) and unscaled (transformed back to the scale of the data) posterior samples. The associated print method prints only the latter.

To facilitate quick evaluation of the Monte Carlo error to posterior standard deviation ratio, plotting of an object of class `MCElist` using `plot()` shows this ratio for each (selected) node and automatically adds a vertical line at the desired cut-off (by default 5%; see Figure 13):

```
R> par(mar = c(3, 5, 0.5, 0.5), mgp = c(2, 0.6, 0), mfrow = c(1, 2))
R> plot(MC_error(mod13a)) # left panel
R> plot(MC_error(mod13a, end = 250)) # right panel
```

7.4. Subset of the MCMC sample

By default, the functions `traceplot()`, `densplot()`, `summary()`, `predict()`, `GR_crit()` and `MC_Error()` use all iterations of the MCMC sample and consider only the parameters of the analysis model (if they were monitored). In this section we describe how the set of iterations

and parameters to display can be changed using the arguments `subset`, `start`, `end` and `thin`.

Subset of parameters

When the main parameters of the analysis model have been monitored in a `JointAI` object, i.e., when `monitor_params` was set to `TRUE`, only these parameters are returned in the model summary, plots and criteria shown above. If the main parameters of the analysis model were not monitored and the argument `subset` is not specified, all parameters that were monitored are displayed.

To display output for nodes other than the main parameters of the analysis model or for a subset of nodes, the argument `subset` needs to be specified.

Example: To display only the parameters of the imputation models, we set `subset = c(analysis_main = FALSE, imp_pars = TRUE)` (after re-estimating the model with the monitoring for these parameters switched on):

```
R> mod13c <- update(mod13a, monitor_params = c(imp_pars = TRUE))
R> summary(mod13c, subset = c(analysis_main = FALSE, imp_pars = TRUE))
```

Linear model fitted with `JointAI`

Call:

```
lm_imp(formula = SBP ~ gender + WC + alc + creat, data = NHANES,
       n.iter = 500, monitor_params = c(imp_pars = TRUE))
```

Posterior summary:

	Mean	SD	2.5%	97.5%	tail-prob.	GR-crit
alpha[1]	0.1672	0.0990	-0.0316	0.35304	0.0947	1.00
alpha[2]	-0.3545	0.1448	-0.6383	-0.06819	0.0133	1.00
alpha[3]	0.4902	0.0901	0.3152	0.67287	0.0000	1.00
alpha[4]	-1.0435	0.1304	-1.3167	-0.79152	0.0000	1.00
alpha[5]	0.0771	0.0640	-0.0498	0.20312	0.2320	1.01
alpha[6]	-0.1542	0.2488	-0.6400	0.32795	0.5253	1.02
alpha[7]	-0.8153	0.4231	-1.6334	0.00156	0.0507	1.03
alpha[8]	0.0856	0.1652	-0.2298	0.40814	0.6360	1.00
alpha[9]	-0.2270	0.2063	-0.6365	0.15727	0.2733	1.01
tau_WC	1.0250	0.1106	0.8191	1.24915	0.0000	1.00
tau_creat	1.4048	0.1540	1.1045	1.70215	0.0000	1.02

MCMC settings:

Iterations = 101:600

Sample size per chain = 500

Thinning interval = 1

Number of chains = 3

Number of observations: 186

Example: To select only some of the parameters, they can be specified directly by name via the `other` element of `subset` (output not shown).

```
R> densplot(mod13a, subset = list(other = c('creat', 'alc>=1')))
```

Example: This also works when a subset of the imputed values should be displayed:

```
R> # re-fit the model and monitor the imputed values
R> mod13d <- update(mod13a, monitor_params = c(imps = TRUE))
R>
R> # select all imputed values for 'WC' (3rd column of Xc)
R> sub3 <- grep('Xc\\[[[:digit:]]+,3\\]', parameters(mod13d), value = TRUE)
R> sub3
```

```
[1] "Xc[33,3]" "Xc[150,3]"
```

```
R> # pass "sub3" to "subset" via "other", for example in a traceplot:
R> # traceplot(mod13d, subset = list(other = sub3), ncol = 2)
```

Example: When the number of imputed values is large or in order to check convergence of random effects, it may not be feasible to plot and inspect all traceplots. In that case, a random subset of, for instance, the random effects, can be selected (output not shown):

```
R> # re-fit the model monitoring the random effects
R> mod13e <- update(mod13b, monitor_params = c(ranef = TRUE))
R>
R> # extract random intercepts and random slopes
R> ri <- grep('^b\\[[[:digit:]]+,1\\]$', colnames(mod13e$MCMC[[1]]),
R>           value = TRUE)
R> rs <- grep('^b\\[[[:digit:]]+,2\\]$', colnames(mod13e$MCMC[[1]]),
R>           value = TRUE)
R>
R> # to plot the chains of 12 randomly selected random intercepts and slopes:
R> traceplot(mod13e, subset = list(other = sample(ri, size = 12)), ncol = 4)
R> traceplot(mod13e, subset = list(other = sample(rs, size = 12)), ncol = 4)
```

Subset of MCMC samples

With the arguments `start`, `end` and `thin` it is possible to select which iterations from the MCMC sample are included in the summary. `start` and `end` specify the first and last iterations

to be used, `thin` the thinning interval. Specification of `start` thus allows the user to discard a “burn-in”, i.e., the iterations before the MCMC chain had converged.

7.5. Predicted values

Often, the aim of an analysis is not only to estimate the association between outcome and covariates but to predict future outcomes or outcomes for new subjects.

The function `predict()` allows us to obtain predicted values and corresponding credible intervals from `JointAI` objects. Note that for mixed models, currently only prediction for an “average” subject is implemented, not prediction conditional on the random effects. A dataset containing data for which the prediction should be performed for is specified via the argument `newdata`. The argument `quantiles` allows specification of the quantiles of the posterior sample that are used to obtain the credible interval (by default the 2.5% and 97.5% quantile). Arguments `start`, `end` and `thin` control the subset of MCMC samples used.

```
R> predict(mod13a, newdata = NHANES[27, ])

$dat
      SBP gender age      race   WC alc educ creat albu
392 126.6667  male  32 Mexican American 94.1 <1 low  0.83  4.2
      uricacid bili occup  smoke      fit      2.5%      97.5%
392      8.7    1  <NA> former 116.2312 112.3218 120.1728

$fit
[1] 116.2312

$quantiles
      [,1]
2.5% 112.3218
97.5% 120.1728
```

`predict()` returns a list with elements `dat` (a dataset consisting of `newdata` with the predicted values and quantiles appended), `fit` (the predicted values) and `quantiles` (the quantiles that form the credible interval).

Prediction to visualize non-linear effects

Another reason to obtain predicted values is the visualization of non-linear effects (see Figure 14). To facilitate the generation of a dataset for such a prediction, the function `predDF()` can be used. It generates a `data.frame` that contains a sequence of values through the range of observed values for a covariate specified by the argument `var`, and the median or reference value for all other continuous and categorical variables.

```
R> # create dataset for prediction
R> newDF <- predDF(mod13b, var = "age")
R>
R> # obtain predicted values
```

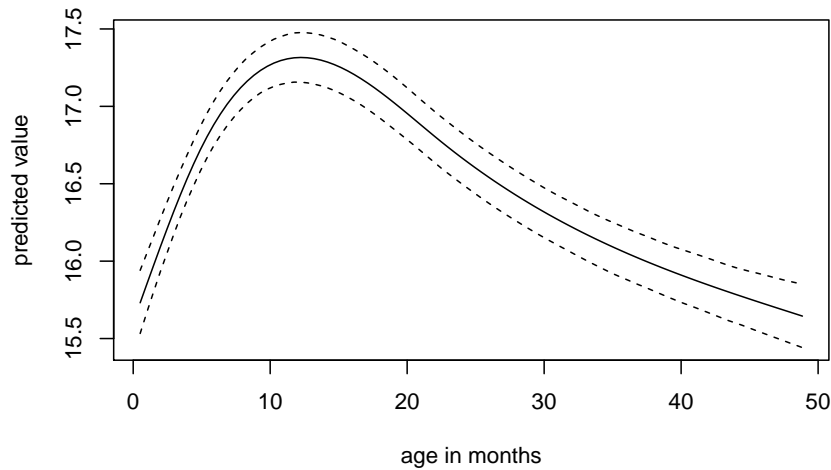


Figure 14: Predicted values of BMI and corresponding 95% credible interval from `mod13b`.

```
R> pred <- predict(mod13b, newdata = newDF)
R>
R> # plot predicted values and credible interval
R> matplot(pred$dat$age, pred$dat[, c('fit', '2.5%', '97.5%')],
R+       lty = c(1,2,2), type = 'l', col = 1,
R+       xlab = 'age in months', ylab = 'predicted value')
```

7.6. Export of imputed values

Imputed datasets can be extracted from a `JointAI` object (in which a monitor for the imputed values has been set, i.e., `monitor_params = c(imps = TRUE)`) with the function `get_MIdat()`.

A completed dataset is created by taking the imputed values from a randomly chosen iteration of the MCMC sample, transforming them back to the original scale (if scaling was performed before the MCMC sampling) and filling them into the original incomplete data.

The argument `m` specifies the number of imputed datasets to be created, `include` controls whether the original data are included in the long format `data.frame` (default is `include = TRUE`), `start` specifies the first iteration that may be used, and `minspace` is the minimum number of iterations between iterations eligible for selection. To make the selection of iterations reproducible, a seed value can be specified via the argument `seed`.

When `export_to_SPSS = TRUE` the imputed data is exported to SPSS (IBM SPSS Statistics, IBM Corp.), i.e., a `.txt` file containing the data and a `.sps` file containing SPSS syntax to convert the data into an SPSS data file (with ending `.sav`) are written. Arguments `filename` and `resdir` allow specification of the name of the `.txt` and `.sps` file and the directory they are written to.

`get_MIdat()` returns a long-format `data.frame` containing the imputed datasets (and by

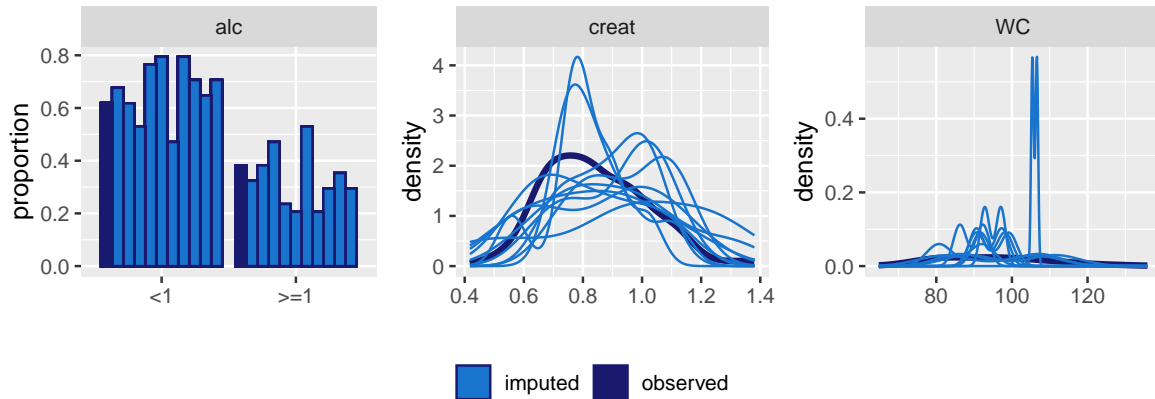


Figure 15: Distribution of observed and imputed values.

default the original data) stacked on top of each other. The imputation number is given in the variable `Imputation_`, column `.id` contains a newly created id variable for each observation in cross-sectional data (multi-level data should already contain an id variable) and the column `.rownr` identifies rows of the original data (relevant in multi-level data).

```
R> impDF <- get_MIdat(mod13d, m = 10, seed = 2019)
```

The function `plot_imp_distr()` allows visual comparison of the distributions of the observed and imputed values (Figure 15). The distribution of the observed values is shown in dark blue, the distribution of the imputed values per dataset in light blue.

```
R> plot_imp_distr(impDF, nrow = 1)
```

8. Assumptions and extensions

Like any statistical model, the approach to imputation followed in **JointAI** relies on assumptions that need to be satisfied in order to obtain valid results.

A commonly made assumption that is also required for **JointAI** is that the missing data mechanism is ignorable, i.e., that data is missing at random (MAR) or Missing Completely At Random (MCAR) (Rubin 1976) and that parameters in the model of the missingness mechanism are independent of the parameters in the data model (Schafer 1997). It is the task of the researcher to critically evaluate whether this assumption is satisfied for a given dataset and model.

Furthermore, all models involved in the imputation and analysis need to be correctly specified. In current implementations of imputation procedures in software, imputation models are typically automatically specified, using standard assumptions like linear associations and default model types. In **JointAI**, the arguments `models` and `auxvar` permit tailoring of the automatically chosen models to some extent, by allowing the user to choose non-normal imputation models for continuous variables and to include variables or functional forms of variables that are not used in the analysis model in the linear predictor of the imputation models.

When using auxiliary variables in **JointAI**, it should be noted that due to the ordering of the conditional distributions in the sequence of models it is implied that the auxiliary variable is independent of the outcome, since neither the model for the auxiliary variable (if the auxiliary variable has missing values) has the outcome in its linear predictor nor vice versa.

Moreover, in order to make software usable, default values have to be chosen for various parameters. These default values are chosen to work well in certain settings, but can not be guaranteed to be appropriate in general and it is the task of the user to make the appropriate changes. In **JointAI** this concerns, for example, the choice of hyperparameters and automatically chosen types of imputation models.

To expand the range of settings in which **JointAI** provides a valid and user-friendly way to simultaneously analyse and impute data, several extensions are planned, for example:

- Implementation of (penalized) splines for incompletely observed covariates.
- Facilitate evaluation of model fit by providing functionality to perform posterior predictive checks.
- Implementation of subject-specific prediction from mixed models.
- Extension of the Cox model to handle time-varying covariates.
- Implementation of imputation for unordered level-1 covariates.
- Implementation of additional shrinkage priors.
- Implementation of additional model types, for example, using zero-inflated or overdispersed distributions.

A. Default hyperparameters

```
R> default_hyperpars()
```

```
$norm
```

mu_reg_norm	tau_reg_norm	shape_tau_norm	rate_tau_norm
0e+00	1e-04	1e-02	1e-02

```
$gamma
```

mu_reg_gamma	tau_reg_gamma	shape_tau_gamma	rate_tau_gamma
0e+00	1e-04	1e-02	1e-02

```
$beta
```

mu_reg_beta	tau_reg_beta	shape_tau_beta	rate_tau_beta
0e+00	1e-04	1e-02	1e-02

```
$logit
```

mu_reg_logit	tau_reg_logit
0e+00	1e-04

```
$poisson
```

mu_reg_poisson	tau_reg_poisson
----------------	-----------------

```

0e+00      1e-04

$probit
  mu_reg_probit tau_reg_probit
    0e+00      1e-04

$multinomial
  mu_reg_multinomial tau_reg_multinomial
        0e+00      1e-04

$ordinal
  mu_reg_ordinal tau_reg_ordinal mu_delta_ordinal
        0e+00      1e-04      0e+00
tau_delta_ordinal
        1e-04

$Z
function (nranef)
{
  if (nranef > 1) {
    RinvD <- diag(as.numeric(rep(NA, nranef)))
    KinvD <- nranef
  }
  else {
    RinvD <- KinvD <- NULL
  }
  list(RinvD = RinvD, KinvD = KinvD, shape_diag_RinvD = 0.1,
       rate_diag_RinvD = 0.01)
}
<bytecode: 0x00000000172bb0e0>
<environment: 0x000000001228e4b0>

$surv
  mu_reg_surv tau_reg_surv
    0.000      0.001

$coxph
  c      r      eps
1e-03 1e-01 1e-10

```


References

- Bartlett JW, Seaman SR, White IR, Carpenter JR (2015). “Multiple Imputation of Covariates by Fully Conditional Specification: Accommodating the Substantive Model.” *Statistical Methods in Medical Research*, **24**(4), 462–487. doi:10.1177/0962280214521348.
- Brooks SP, Gelman A (1998). “General Methods for Monitoring Convergence of Iterative Simulations.” *Journal of computational and graphical statistics*, **7**(4), 434–455. doi:10.1080/10618600.1998.10474787.
- Corporation M, Weston S (2018). *doParallel: Foreach Parallel Adaptor for the ‘parallel’ Package*. R package version 1.0.14, URL <https://CRAN.R-project.org/package=doParallel>.
- Erler NS (2019). *JointAI: Joint Analysis and Imputation of Incomplete Data*. R package version 0.5.2, URL <https://nerler.github.io/JointAI>.
- Erler NS, Rizopoulos D, Jaddoe VW, Franco OH, Lesaffre EM (2019). “Bayesian Imputation of Time-Varying Covariates in Linear Mixed Models.” *Statistical Methods in Medical Research*, **28**(2). doi:10.1177/0962280217730851.
- Erler NS, Rizopoulos D, van Rosmalen J, Jaddoe VW, Franco OH, Lesaffre EM (2016). “Dealing with Missing Covariates in Epidemiologic Studies: A Comparison between Multiple Imputation and a Full Bayesian Approach.” *Statistics in Medicine*, **35**(17), 2955–2974. doi:10.1002/sim.6944.
- Flegal JM, Hughes J, Vats D, Dai N (2017). *mcmcse: Monte Carlo Standard Errors for MCMC*. Riverside, CA, Denver, CO, Coventry, UK, and Minneapolis, MN. R package version 1.3-2.
- Gelman A, Rubin DB (1992). “Inference from Iterative Simulation Using Multiple Sequences.” *Statistical Science*, **7**(4), 457–472. doi:10.1214/ss/1177011136.
- Ibrahim JG, Chen MH, Lipsitz SR (2002). “Bayesian Methods for Generalized Linear Models with Covariates Missing At Random.” *Canadian Journal of Statistics*, **30**(1), 55–78. doi:10.2307/3315865.
- Lesaffre E, Lawson AB (2012). *Bayesian Biostatistics*. John Wiley & Sons. ISBN 978-0-470-01823-1. doi:10.1002/9781119942412.
- Lunn D, Jackson C, Best N, Spiegelhalter D, Thomas A (2012). *The BUGS Book: A Practical Introduction to Bayesian Analysis*. Chapman and Hall/CRC. ISBN 9781584888499.
- Microsoft, Weston S (2017). *foreach: Provides Foreach Looping Construct for R*. R package version 1.4.4, URL <https://CRAN.R-project.org/package=foreach>.
- National Center for Health Statistics (NCHS) (2011 – 2012). “National Health and Nutrition Examination Survey Data.” URL <https://www.cdc.gov/nchs/nhanes/>.
- Novo AA, Schafer JL (2013). *norm: Analysis of multivariate normal datasets with missing values*. R package version 1.0-9.5, URL <https://CRAN.R-project.org/package=norm>.

- Pinheiro J, Bates D, DebRoy S, Sarkar D, R Core Team (2019). *nlme: Linear and Nonlinear Mixed Effects Models*. R package version 3.1-139, URL <https://CRAN.R-project.org/package=nlme>.
- Plummer M (2003). “JAGS: A Program for Analysis of Bayesian Graphical Models using Gibbs Sampling.” In K Hornik, F Leisch, A Zeileis (eds.), *Proceedings of the 3rd International Workshop on Distributed Statistical Computing (DSC 2003)*. ISSN: 1609-395X.
- Plummer M (2017). *JAGS Version 4.3.0 User Manual*. URL https://sourceforge.net/projects/mcmc-jags/files/Manuals/4.x/jags_user_manual.pdf/download.
- Plummer M (2018). *rjags: Bayesian Graphical Models using MCMC*. R package version 4-8, URL <https://CRAN.R-project.org/package=rjags>.
- Plummer M, Best N, Cowles K, Vines K (2006). “CODA: Convergence Diagnosis and Output Analysis for MCMC.” *R News*, **6**(1), 7–11. URL <https://journal.r-project.org/archive/>.
- R Core Team (2019). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria. URL <https://www.R-project.org/>.
- Rubin D (1987). *Multiple Imputation for Nonresponse in Surveys*. Wiley Series in Probability and Statistics. Wiley.
- Rubin DB (1976). “Inference and Missing Data.” *Biometrika*, **63**(3), 581–592. doi:10.2307/2335739.
- Rubin DB (2004). “The Design of a General and Flexible System for Handling Nonresponse in Sample Surveys.” *The American Statistician*, **58**, 298–302. doi:10.1198/000313004X6355.
- Schafer J (1997). *Analysis of Incomplete Multivariate Data*. Chapman & Hall/CRC Monographs on Statistics & Applied Probability. Taylor & Francis.
- Terry M Therneau, Patricia M Grambsch (2000). *Modeling Survival Data: Extending the Cox Model*. Springer, New York. ISBN 0-387-98784-3.
- Therneau TM (2015). *A Package for Survival Analysis in S*. Version 2.38, URL <https://CRAN.R-project.org/package=survival>.
- Van Buuren S (2012). *Flexible Imputation of Missing Data*. Chapman & Hall/CRC Interdisciplinary Statistics. Taylor & Francis.
- Van Buuren S, Groothuis-Oudshoorn K (2011). “mice: Multivariate Imputation by Chained Equations in R.” *Journal of Statistical Software*, **45**(3), 1–67. URL <https://www.jstatsoft.org/v45/i03/>.
- White IR, Royston P, Wood AM (2011). “Multiple Imputation using Chained Equations: Issues and Guidance for Practice.” *Statistics in medicine*, **30**(4), 377–399. doi:10.1002/sim.4067.
- Wickham H (2016). *ggplot2: Elegant Graphics for Data Analysis*. Springer-Verlag New York. ISBN 978-3-319-24277-4. URL <https://ggplot2.tidyverse.org>.

Affiliation:

Nicole S. Erler
Erasmus Medical Center
Department of Biostatistics
Doctor Molewaterplein 40
3015 GD Rotterdam, the Netherlands
E-mail: n.erler@erasmusmc.nl
URL: www.nerler.com